

Date		Project	
Type		Part Number	



ALL-IN-ONE PERFORMANCE LIGHTING

EMERGENCY Series

Emergency Remote Heads

This compact emergency light is impact resistant and allows for both wall and ceiling surface mounting. Each head is an adjustable swivel which locks in position for installation convenience. The canopy is designed to mount directly to a typical electrical junction box.



PRODUCT FEATURES

- Universal Voltage LED remote heads compatible with any emergency lighting system (5-24VDC)
- UL-94V-0 Flame rating, fire-retardant
- Suitable for Damp Locations
- Operating Temperature: 50°F - 104°F (10°C - 40°C)
- 5 year warranty

KEY SPECIFICATIONS

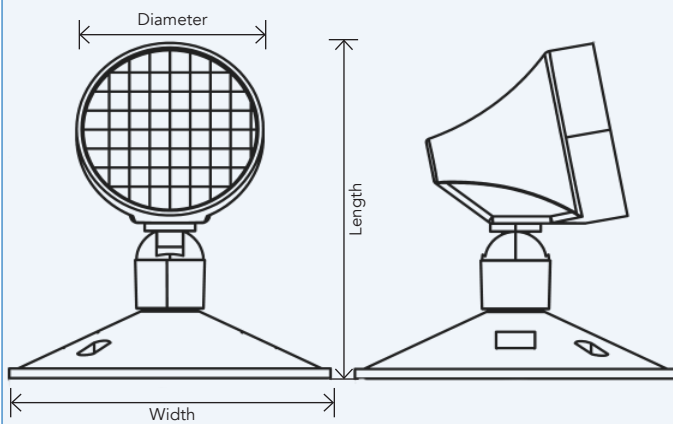
Voltage	Up to 24VDC
Power	2W or 5W
Head Wattage	2W or 5W Options
Lumens	Up to 940 lm
Material	ABS body, PC lens
Mounting	Wall and Ceiling
Applications	Commercial, Warehouse, Retail Facilities



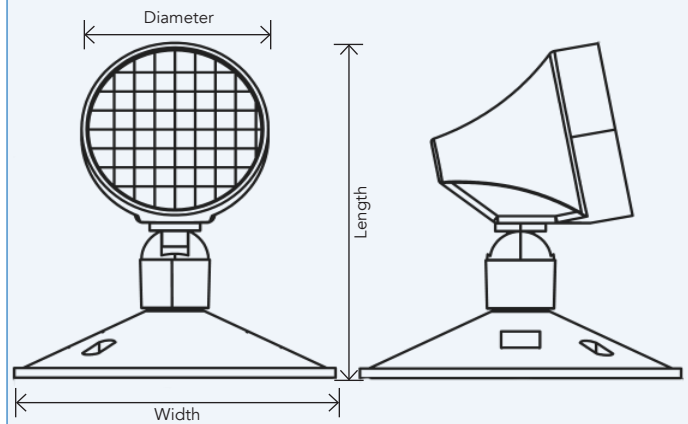
SPECIFICATIONS

Order#	Model	Wattage	Voltage	Lumens
R61101	RENO-ERH2W-1	2W	3.6V-24VDC	130 lm
R61106	RENO-ERH5W-1	5W	5V-24VDC	470 lm
R61103	RENO-ERH2W-2	2 x 2W	3.6V-24VDC	2 x 130 lm
R61105	RENO-ERH5W-2	2 x 5W	5V-24VDC	2 x 470 lm

DIMENSIONS

R61101


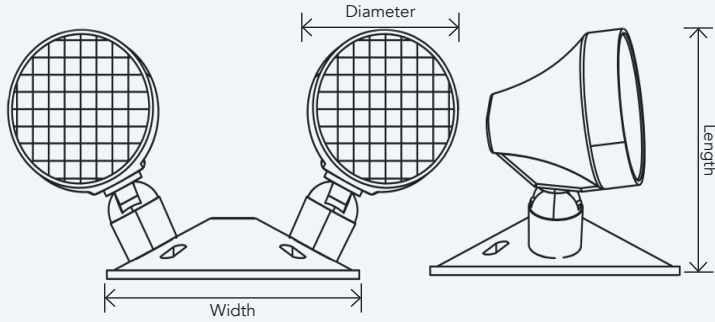
Width: 4.87" (123.7 mm)
 Diameter: 2.62" (66.5 mm)
 Length: 5.25" (133.3 mm)

R61106


Width: 4.75" (120.6 mm)
 Diameter: 3.62" (91.9 mm)
 Length: 5.5" (139.7 mm)

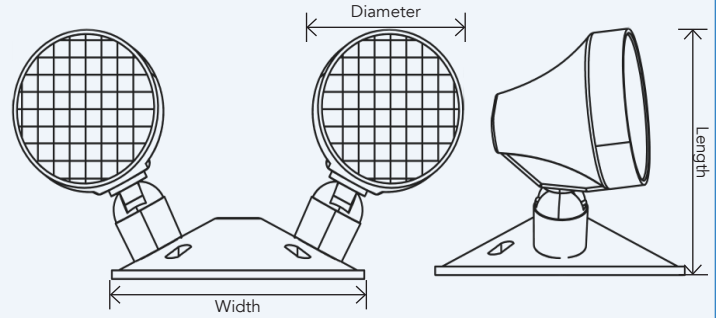
DIMENSIONS CONT'D

R61103



Width: 4.87" (123.7 mm)
Diameter: 2.62" (66.5 mm)
Length: 5.25" (133.3 mm)

R61105



Width: 4.75" (120.6 mm)
Diameter: 3.62" (91.9 mm)
Length: 5.5" (139.7 mm)