

Date		Project	
Type		Part Number	



ALL-IN-ONE PERFORMANCE LIGHTING

# EMERGENCY Series

## Running Man Combo Sign

The Emergency Series Running Man Sign is encased in UV-stabilized thermoplastic material. It comes standard with a mounting canopy, three pictograms, one backplate and all mounting hardware. An external LED status indicator and test switch is standard. Powered with long life LED chips, they are the perfect choice for both new and retrofit projects.



## PRODUCT FEATURES

- Plastic housing and PC pictogram sign
- Thermoplastic ABS heads
- Universal (wall, ceiling, side) mounting
- Universal field-selectable single/double-face
- Damp location rated
- Nickel Cadmium Battery
- 120 minutes discharge after battery charge 24 hours
- Operating temperature: 14°F to +104°F (-10°C to +40°C)
- Fully-illuminated 6" characters
- High illuminance LED display
- 5 year warranty




## KEY SPECIFICATIONS

<b>Input Voltage</b>	120/277/347V
<b>Power</b>	2W
<b>Lamp Power</b>	2 x 2W
<b>Lamp Lumens</b>	350 lm
<b>Power Factor</b>	>0.9
<b>Discharge Time</b>	>120 Minutes
<b>Recharge Time</b>	24 Hours
<b>Finish</b>	White
<b>Applications</b>	Commercial, Warehouses, Retail, Education Facilities
<b>Mounting</b>	Wall, End, and Ceiling

## SPECIFICATIONS

Order#	Model	Input Voltage	Output Voltage	Power	Discharge Time	Charging Time	Battery Type
R61002	RENO-RMC-U	120-347VAC	3.6V	2W Heads: 2 x 2W	>120 Minutes	24 Hours	3.6V Ni-CD

## MOUNTING

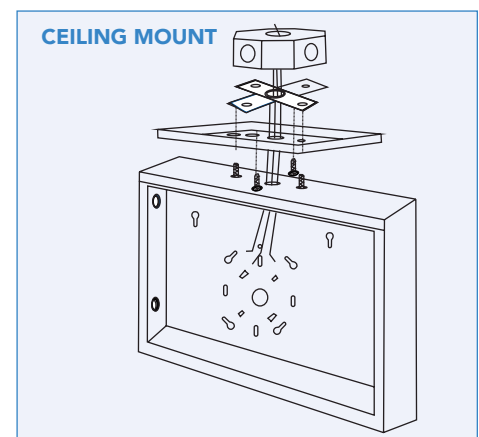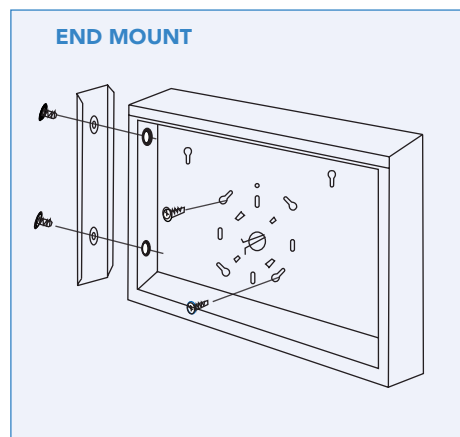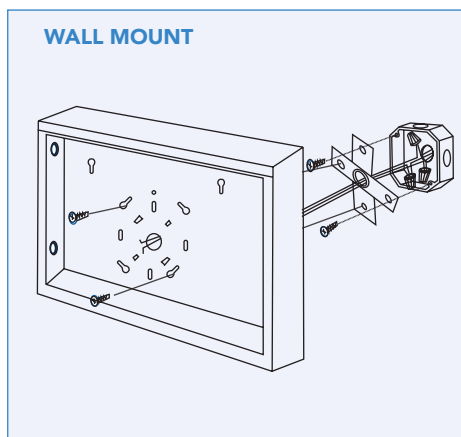

## PICTOGRAMS



LEFT



STRAIGHT (REVERSIBLE)



RIGHT

## DIMENSIONS

Width: 11.4" (290.2 mm)  
Depth: 2" (50.8 mm)  
Length: 13.62" (346.1 mm)  
Weight: 2.2 lbs (.99 kg)

