




RAIL Series

Architectural Rounded Strip

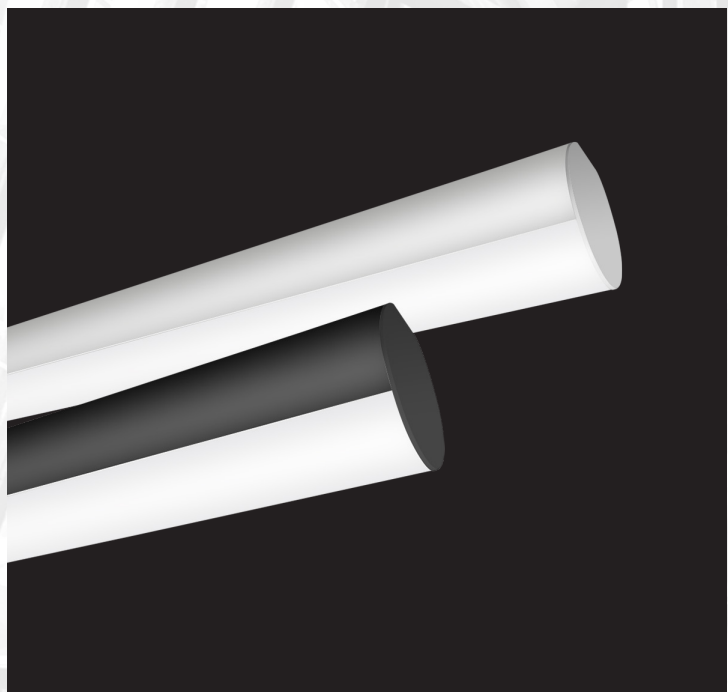

Date		Project	
Type		Part Number	

ARCHITECTURAL LUMINAIRES BY  **RENO**
LIGHTING

Illuminate spaces like never before with the RAIL SERIES Architectural Rounded Linear Strip System. This linear strip system offers the freedom to elevate any room.

Whether a designer seeks the organic grace of natural forms or the precision of modern design, the RAIL SERIES adapts seamlessly to their vision, resulting in a innovative design of light.



Product Features

- Aluminum Housing with Powder-Coated Finish
- Modern White or Matte Black finish
- Frosted Polycarbonate Lens creates a even light distribution
- Surface Mount clips and screws included
- Suspension and Wall Mounting kits sold separately
- 1.5kVA Surge Protection
- Class II driver, with 0-10V or Triac Dimming
- Higher efficacy, up to 146 lm/W
- IP20 Damp Location Rated
- Operating Temperature: -4°F to +104°F (-20°C to +40°C)
- Rated lifetime L70: >100,000 hours
- 10 Year Limited Warranty

Key Specifications

Voltage	120-347V
Wattage	Selectable: 20/30/40W
Length	4FT
Power Factor	>0.9
CCT	Selectable: 30/35/40/5000K
CRI	>80
Lumens	Up to 5,483 lm
Beam Angle	120°
Dimming	0-10V, Triac Dimming
Mounting	Surface (Included), Suspension, Wall





RAIL Series | Architectural Rounded Strip

ARCHITECTURAL LUMINAIRES BY  RENO[™]
LIGHTING

Specifications

Order#	Model	Wattage	Efficacy	Lumens	CCT	Finish
R33411	RENO-RALS4-DV-MW-MCCT-WH	20W	139 lm/W	2,780 lm	3000K	White
			141 lm/W	2,821 lm	3500K	
			143 lm/W	2,865 lm	4000K	
			146 lm/W	2,924 lm	5000K	
		30W	138 lm/W	4,125 lm	3000K	
			141 lm/W	4,241 lm	3500K	
			140 lm/W	4,189 lm	4000K	
			146 lm/W	4,389 lm	5000K	
		40W	129 lm/W	5,148 lm	3000K	
			131 lm/W	5,225 lm	3500K	
			133 lm/W	5,322 lm	4000K	
			137 lm/W	5,483 lm	5000K	
R33412	RENO-RALS4-DV-MW-MCCT-BK	20W	139 lm/W	2,780 lm	3000K	Black
			141 lm/W	2,821 lm	3500K	
			143 lm/W	2,865 lm	4000K	
			146 lm/W	2,924 lm	5000K	
		30W	138 lm/W	4,125 lm	3000K	
			141 lm/W	4,241 lm	3500K	
			140 lm/W	4,189 lm	4000K	
			146 lm/W	4,389 lm	5000K	
		40W	129 lm/W	5,148 lm	3000K	
			131 lm/W	5,225 lm	3500K	
			133 lm/W	5,322 lm	4000K	
			137 lm/W	5,483 lm	5000K	






RAIL Series | Architectural Rounded Strip

ARCHITECTURAL LUMINAIRES BY  RENO[™]
LIGHTING


Accessories – Upper Luminous Module

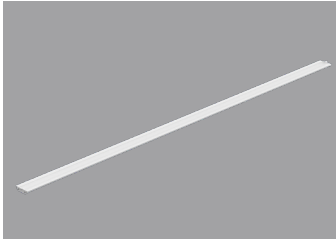


R39531
RENO-RALS4-UP
4ft Upper Luminous Module

Order#	Model	Description
R39531	RENO-RALS4-UP	4ft Upper Luminous Module


Accessories – Mounting

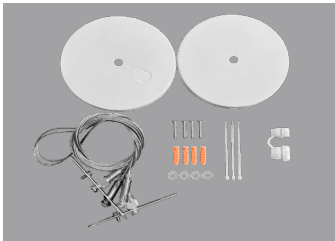


R39532
RENO-RALS-CANOPY-WH
Suspension Kit

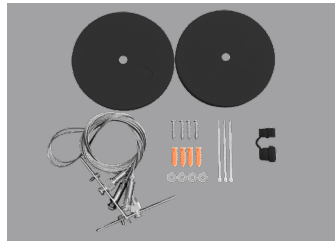

R59533
RENO-RALS-CANOPY-BK
Suspension Kit

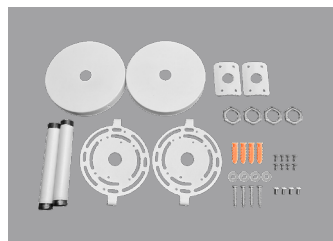

R39534
RENO-RALS-WMB-WH
Wall Mount Kit

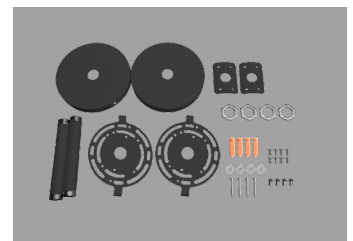

R39535
RENO-RALS-WMB-BK
Wall Mount Kit

Order#	Model	Description
R39532	RENO-RALS-CANOPY-WH	10ft Suspension Kit White Finish
R39533	RENO-RALS-CANOPY-BK	10ft Suspension Kit Black Finish
R39534	RENO-RALS-WMB-WH	Wall Mounting Kit White Finish
R39535	RENO-RALS-WMB-BK	Wall Mounting Kit Black Finish







RAIL Series | Architectural Rounded Strip

ARCHITECTURAL LUMINAIRES BY  **RENO**
LIGHTING

Dimensions

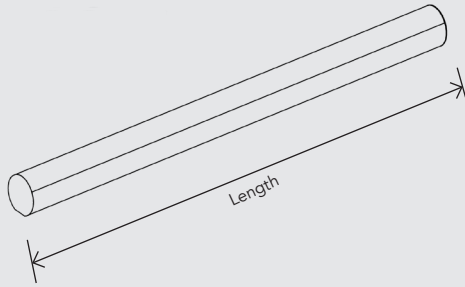

Length: 47.2" (1198 mm)

Height: 3.25" (82.5 mm)

Width: 3.39" (86 mm)

Weight: 6.6 lbs (3 kg)









RAIL Series | Architectural Rounded Strip

ARCHITECTURAL LUMINAIRES BY  RENO[™]
LIGHTING


Mounting Options

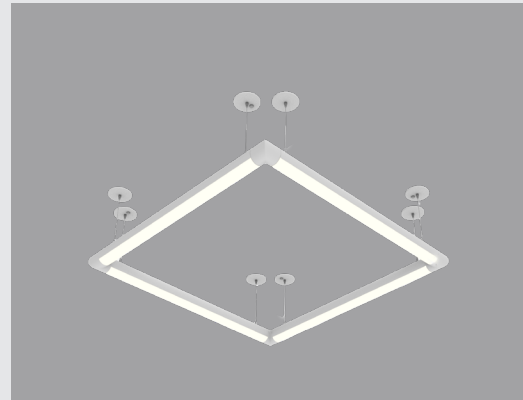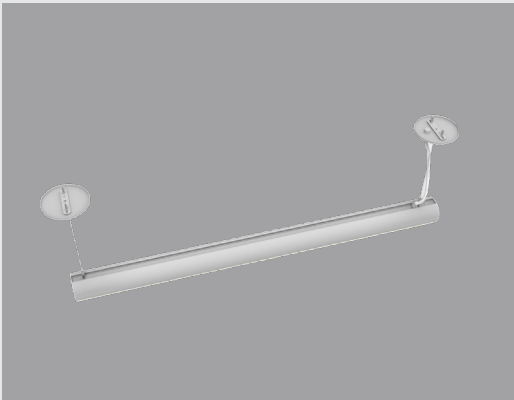

Suspension Mounting Option

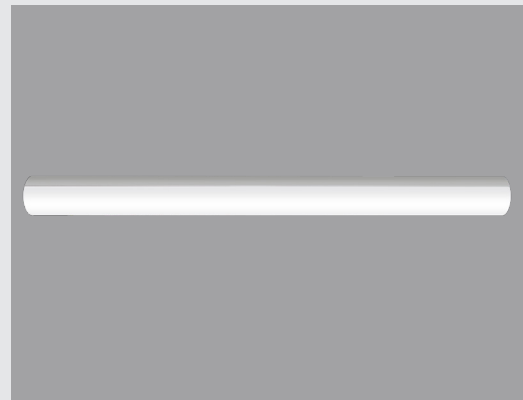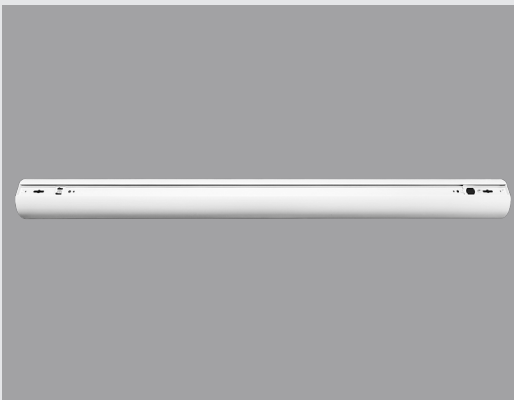

Surface Mounting Option (Included)




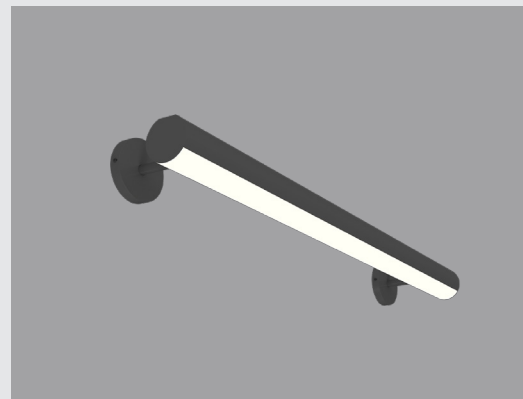


Wall Mounting Option

*Drilling the fixture body is required for wall mount applications



Photometrics

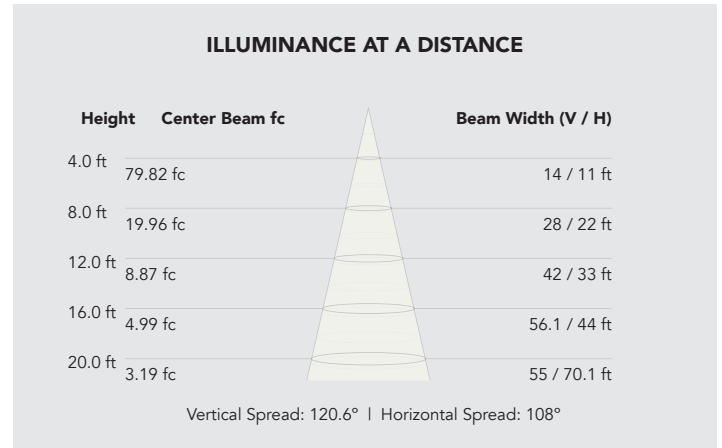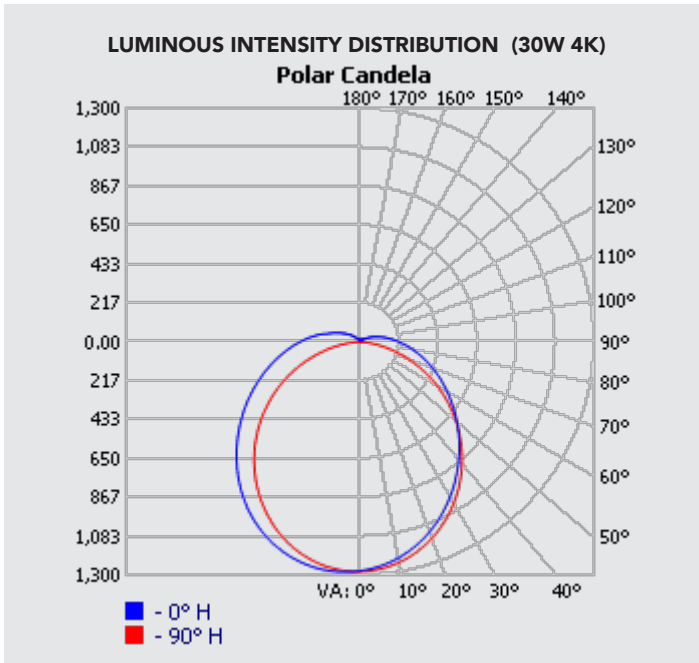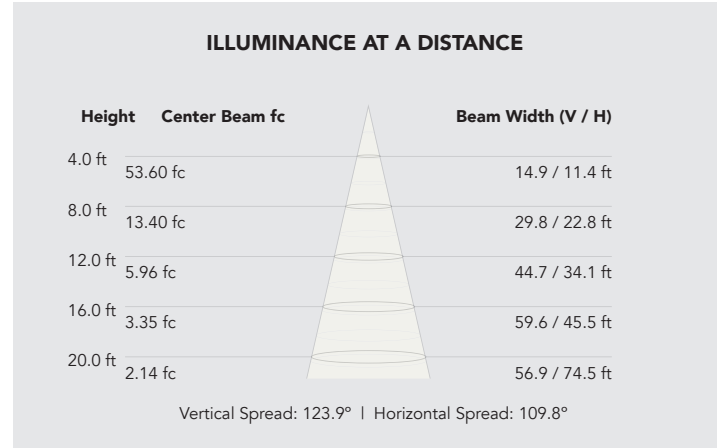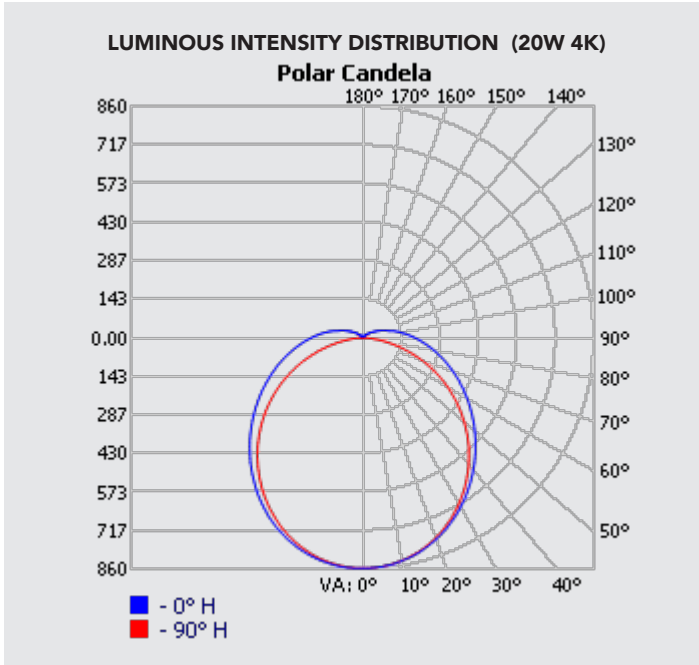



Photometrics

