Date: _____ Project: _____

Type: _____ Part #: _____



Helios Series

Slim Body Wraparound Fixture

The Helios series embraces a minimalist design while providing a wide array of features making this fixture adaptable to any indoor application. Utilize the colour and wattage selections built into the fixture to create the perfect look. Easy to install and built to last, this series is sure to impress

RENO SMART

DLC LISTED PREMIUM · UL CERTIFIED · MULTI POWER · MULTI CCT · DAMP · DUAL V 120-347V · DIMMABLE · 5 YEARS WARRANTY

Product Features

- DLC Premium for Stairwell and Passageway Luminaires
- Frosted PMMA Lens
- Includes J-Box Cover Plate and V-Hangers
- Suitable for Damp Locations
- Standalone sensor options
- Emergency backup ready
- Reno Smart NLC system
- Operating Temperature: -22°F to +122°F (-30°C to +50°C)
- Rated Lifespan: L70 up to 100,000 Hours

Specifications

Voltage	120-347V
Wattage Selectable	2ft - 15/20/25/30W 4ft - 30/40/50W
Lengths	2ft & 4ft
Power Factor	>0.9
Selectable CCT	35/40/5000K
CRI	>80
Lumens	Up to 7,023 lm
Beam Angle	120°
Dimming	0-10V
Mounting	Surface, & Suspension
Applications	Commercial, Industrial, Warehouse, Retail Facilities

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Specifications – 2FT

Order #	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R38005	RENO-HWR2-DV-MW-MCCT-ECO	15W	120-347V	2,222 lm	148 lm/W	3500K
				2,237 lm	149 lm/W	4000K
				2,257 lm	150 lm/W	5000K
		20W	120-347V	2,903 lm	145 lm/W	3500K
				2,950 lm	147 lm/W	4000K
				2,945 lm	147 lm/W	5000K
		25W	120-347V	3,598 lm	143 lm/W	3500K
				3,708 lm	148 lm/W	4000K
				3,670 lm	146 lm/W	5000K
		30W	120-347V	4,183 lm	139 lm/W	3500K
				4,357 lm	145 lm/W	4000K
				4,293 lm	143 lm/W	5000K

Specifications – 4FT

Order #	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R38011	RENO-HWR4-DV-MW-MCCT-ECO	30W	120-347V	4,183 lm	139 lm/W	3500K
				4,357 lm	145 lm/W	4000K
				4,293 lm	143 lm/W	5000K
		40W	120-347V	5,514 lm	137 lm/W	3500K
				5,697 lm	142 lm/W	4000K
				5,640 lm	141 lm/W	5000K
		50W	120-347V	6,726 lm	134 lm/W	3500K
				7,023 lm	140 lm/W	4000K
				6,905 lm	138 lm/W	5000K

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

DLC Certification

Order #	Model	Application	DLC Standard	DLC Premium
R38005	RENO-HWR2-DV-MW-MCCT-ECO	Direct Linear Ambient Luminaires.	S-KGQD97	-
		Stairwell and Passageway.	-	S-CSQ3M9
R38011	RENO-HWR4-DV-MW-MCCT-ECO	Luminaires for Ambient Lighting	S-6S9FTK	-
		Low-Bay Luminaires	S-966VKK	-
		Stairwell and Passageway	-	S-7LQC69

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Accessories

Mounting




10FT Suspension kits for suspended fixture installation

R39204

RENO-RP

Order #	Model	Description
R39204	RENO-RP	10FT Suspension kits for suspended fixture installation

Emergency Backup



Internal Mount | Lithium | 8W |

R83006

RENO-EM-E08

Order #	Model	Description
R83006	RENO-EM-E08	Internal Mount | Lithium | 8W | 100-347Vac | 7.2V 2600mAh | 50/60Hz | Emergency duration: ≥90mins |

RENO LIGHTING
All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.


Standalone Sensors




PIR Sensor
R72003
RENO-SENSOR-PIR-H-ON/OFF




PIR Sensor
R74002
RENO-SENSOR-PIR-H-EX



Universal Sensor Adaptor with internal driver
R75101
RENO-RS-JK-AD-ANNN



Adjustable 3.5mm Jack to Hardwire " L " Angle Adaptor
R75103
RENO-RS-JK-AD-CORD-L



Long Detection Range PIR Sensor
R74004
RENO-SENSOR-PIR3.5-PH15M



Remote Control for Standalone Sensors (With Screen)
Note: Only 1 needed per project.
R73002
RENO-REMOTE-H



Remote Control for Standalone sensors (Without Screen)
Note: Only 1 needed per project
R73005
RENO-REMOTE-H-ECO

Order #	Model	Description
R72003	RENO-SENSOR-PIR-H-ON/OFF	PIR Sensor
R74002	RENO-SENSOR-PIR-H-EX	PIR Sensor
R75101	RENO-RS-JK-AD-ANNN	Universal Sensor Adaptor with internal driver
R75103	RENO-RS-JK-AD-CORD-L	Adjustable 3.5mm Jack to Hardwire " L " Angle Adaptor
R74004	RENO-SENSOR-PIR3.5-PH15M	Long Detection Range PIR Sensor
R73002	RENO-REMOTE-H	Remote Control for Standalone Sensors (With Screen) Note: Only 1 needed per project
R73005	RENO-REMOTE-H-ECO	Remote Control for Standalone sensors (Without Screen) Note: Only 1 needed per project

RENO LIGHTING
All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Accessories

RENO SMART NLC System



Bluetooth PIR sensor

R75001


RENO-RS-JK-BPDN-12V



Bluetooth microwave sensor

R75002


RENO-RS-JK-BMWM-12V



Universal Sensor Adaptor with internal driver

R75101


RENO-RS-JK-AD-ANNN



Adjustable 3.5mm Jack to Hardwire " L " Angle Adaptor

R75103


RENO-RS-JK-AD-CORD-L



Bluetooth Ceiling mounted gateway

R75201


RENO-RS-GW-BCNW



Bluetooth Reset remote controller

R75301

RENO-RS-RC-BNNN



Bluetooth 7-Key Smart Wall Switch

R75302


RENO-RS-RC-BNNG

Order #	Model	Description
R75001	RENO-RS-JK-BPDN-12V	Bluetooth PIR sensor
R75002	RENO-RS-JK-BMWM-12V	Bluetooth microwave sensor
R75101	RENO-RS-JK-AD-ANNN	Universal Sensor Adaptor with internal driver
R75103	RENO-RS-JK-AD-CORD-L	Adjustable 3.5mm Jack to Hardwire " L " Angle Adaptor
R75201	RENO-RS-GW-BCNW	Bluetooth Ceiling mounted gateway
R75301	RENO-RS-RC-BNNN	Bluetooth Reset remote controller
R75302	RENO-RS-RC-BNNG	Bluetooth 7-Key Smart Wall Switch

All Reno Smart Sensors are programmed and commissioned using the Reno Smart App.

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

PHOTOMETRICS - 2FT 25W/4K

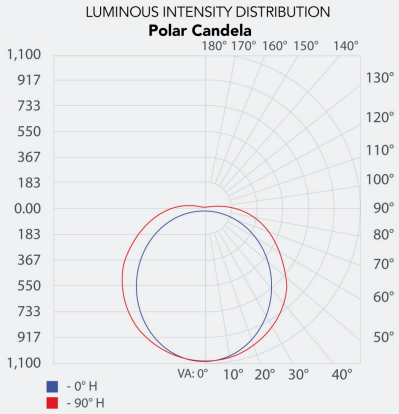


Height	Center Beam (fc)
4.0 ft	67.29 fc
8.0 ft	16.82 fc
12.0 ft	7.48 fc
16.0 ft	4.21 fc
20.0 ft	2.69 fc

Vertical Spread: 102.6°
Horizontal Spread: 127.4°

Beam Width (V/H)
10.0 / 16.2 ft
20.0 / 32.4 ft
30.0 / 48.6 ft
39.9 / 64.8 ft
49.9 / 81.0 ft

PHOTOMETRICS - 4FT 50W/4K

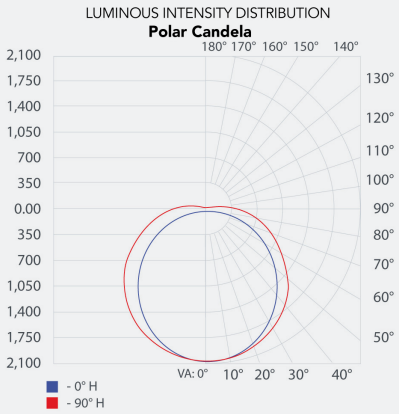

Height	Center Beam (fc)
4.0 ft	128.60 fc
8.0 ft	32.15 fc
12.0 ft	14.29 fc
16.0 ft	8.04 fc
20.0 ft	5.14 fc

Vertical Spread: 103.7°
Horizontal Spread: 127.7°


Beam Width (V/H)
10.2 / 16.3 ft
20.4 / 32.6 ft
30.5 / 48.9 ft
40.7 / 65.2 ft
50.9 / 81.5 ft

RENO LIGHTING

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Dimensions

Slim Body Wraparound Fixture

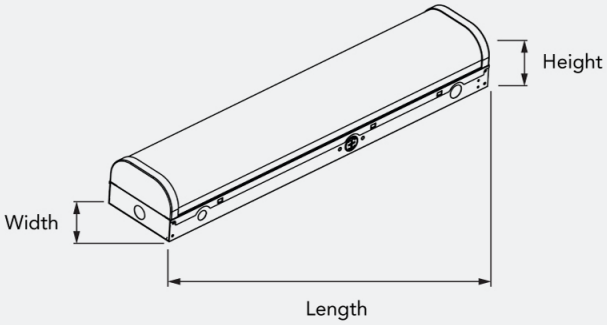

Order #	Size	Length	Width	Height	Weight
R38005	2FT	24in (610 mm)	5.2in (132 mm)	3.8in (97 mm)	3 lbs (1.36 kg)
R38011	4FT	48in (1219 mm)	5.2in (132 mm)	3.8in (97 mm)	5 lbs (2.26 kg)

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.