



Date		Project	
Type		Part Number	


ARCHITECTURAL LUMINAIRES BY  RENO[™] LIGHTING

CLAIR OBSCURE Series

Changeable Silhouette Wall Light



This architectural Up & Down Wall Light redefines exterior lighting with its clean silhouette and dynamic functionality. Designed with interchangeable shade options, it lets you customize the light pattern and visual impact—perfect for creating the right ambiance on any building façade. Durable and striking in black or white, it's built for both performance and presence.

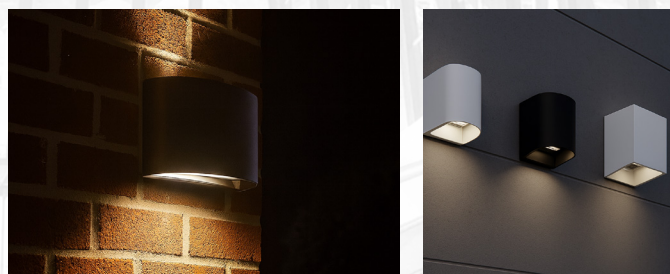

Product Features

- Changeable Silhouette with Shade Accessories
- IP65 Rated for Wet Locations
- IK08 Impact Certified
- Die-Cast Aluminum Body
- Powder-Coated Black or White Finish
- Custom Colours Available
- Glass Lens
- Comes integrated with a photocell switch. Optional on /off
- Adjustable to Up, Down, or Full Light
- 0-100° Adjustable Beam Angle with Shutter Dial
- Operating temperature: -40°F to +122°F (-40°C to +50°C)
- Rated Lifetime L70 >100,000 hrs
- 10 year limited warranty

Key Specifications

Voltage	120-347V
Wattage	Selectable: 8/12/16/20W
Efficacy	Up to 84 lm/W
CCT	Selectable: 2700/3000/4000/5000K
CRI	80
Lumens	Up to 1,582 lm
Beam Angle	Selectable: 20°/40°/80°/100°
Fixture Default Setting	20W @ 5000K/ Full Light/ Photocell Off
Dimming	0-10V
Mounting	Wall
Applications	Commercial, Architectural, and Hospitality
Certifications	ETL, ADA, IP65, IK08





CLAIR OBSCURE Series | Changeable Silhouette Wall Light

ARCHITECTURAL LUMINAIRES BY 

Specifications

Order#	Model	Wattage	Efficacy	Lumens	CCT	Finish
R31411	RENO-WLCY-MW-DV-MCCT-BK	8W	78 lm/W	623 lm	2700K	Black
			81 lm/W	649 lm	3000K	
			83 lm/W	669 lm	4000K	
			82 lm/W	657 lm	5000K	
		12W	77 lm/W	932 lm	2700K	
			81 lm/W	976 lm	3000K	
			84 lm/W	1,014 lm	4000K	
			82 lm/W	982 lm	5000K	
		16W	75 lm/W	1,199 lm	2700K	
			78 lm/W	1,261 lm	3000K	
			82 lm/W	1,317 lm	4000K	
			79 lm/W	1,264 lm	5000K	
		20W	71 lm/W	1,428 lm	2700K	
			75 lm/W	1,510 lm	3000K	
			79 lm/W	1,582 lm	4000K	
			76 lm/W	1,514 lm	5000K	
R31412	RENO-WLCY-MW-DV-MCCT-WH	8W	78 lm/W	623 lm	2700K	White
			81 lm/W	649 lm	3000K	
			83 lm/W	669 lm	4000K	
			82 lm/W	657 lm	5000K	
		12W	77 lm/W	932 lm	2700K	
			81 lm/W	976 lm	3000K	
			84 lm/W	1,014 lm	4000K	
			82 lm/W	982 lm	5000K	
		16W	75 lm/W	1,199 lm	2700K	
			78 lm/W	1,261 lm	3000K	
			82 lm/W	1,317 lm	4000K	
			79 lm/W	1,264 lm	5000K	
		20W	71 lm/W	1,428 lm	2700K	
			75 lm/W	1,510 lm	3000K	
			79 lm/W	1,582 lm	4000K	
			76 lm/W	1,514 lm	5000K	







CLAIR OBSCURE Series | Changeable Silhouette Wall Light

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING


Silhouette Accessories

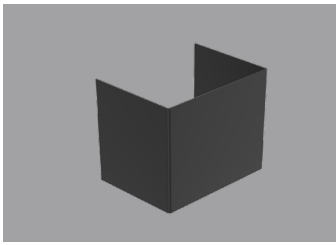


R59431
RENO-WLCY-SQC-BK
Black Square Cover

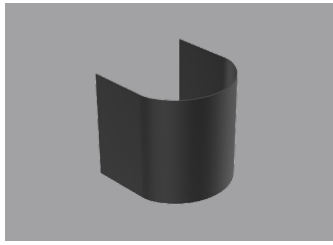


R59432
RENO-WLCY-RDC-BK
Black Round Cover

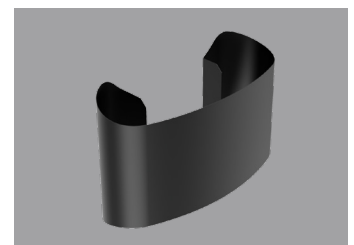


R59433
RENO-WLCY-CLC-BK
Black Cloud Cover

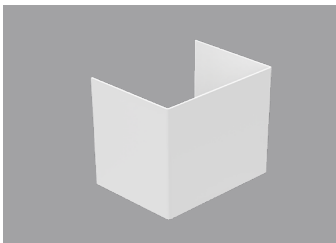

R59434
RENO-WLCY-SQC-WH
White Square Cover

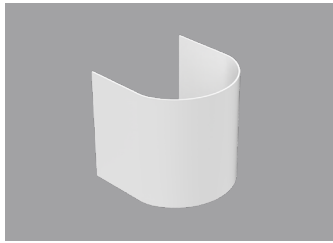


R59435
RENO-WLCY-RDC-WH
White Round Cover

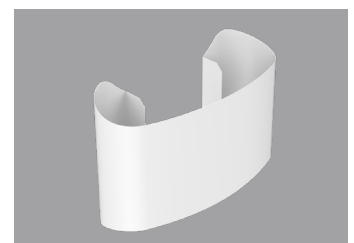

R59436
RENO-WLCY-CLC-WH
White Cloud Cover

Order#	Model	Description
R59431	RENO-WLCY-SQC-BK	Black Square Cover
R59432	RENO-WLCY-RDC-BK	Black Round Cover
R59433	RENO-WLCY-CLC-BK	Black Cloud Cover
R59434	RENO-WLCY-SQC-WH	White Square Cover
R59435	RENO-WLCY-RDC-WH	White Round Cover
R59436	RENO-WLCY-CLC-WH	White Cloud Cover

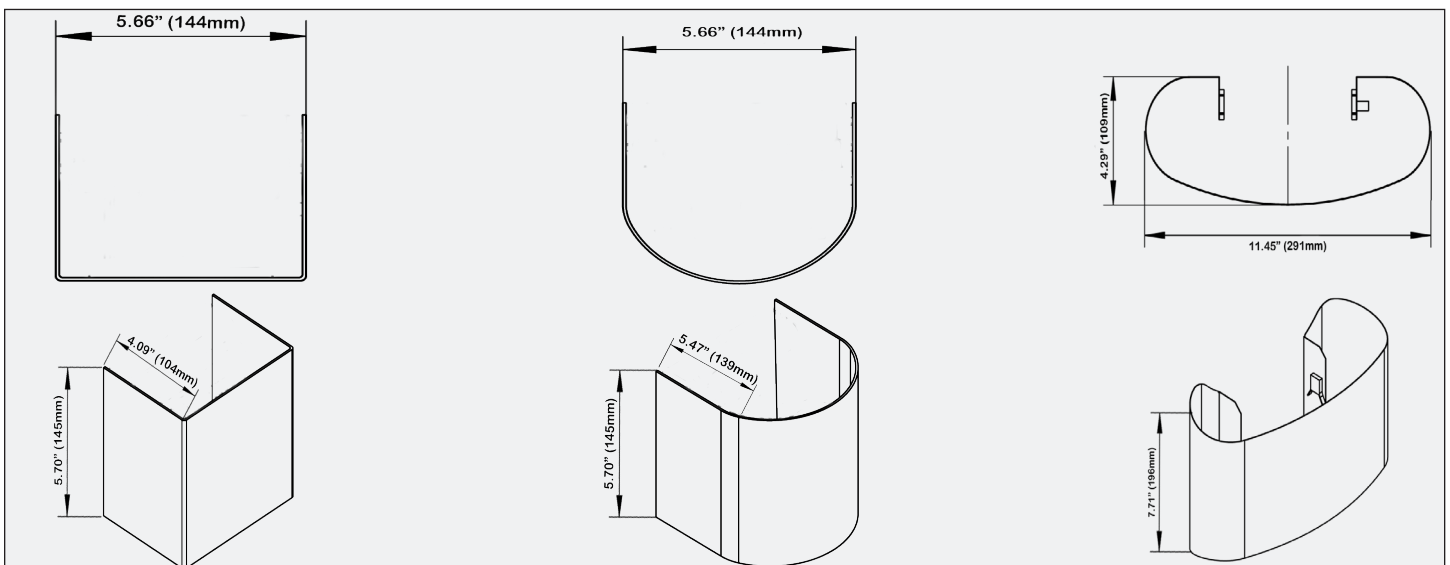




CLAIR OBSCURE Series | Changeable Silhouette Wall Light

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

Photometrics

LUMINOUS INTENSITY DISTRIBUTION (20W 4K, FULL LIGHT)

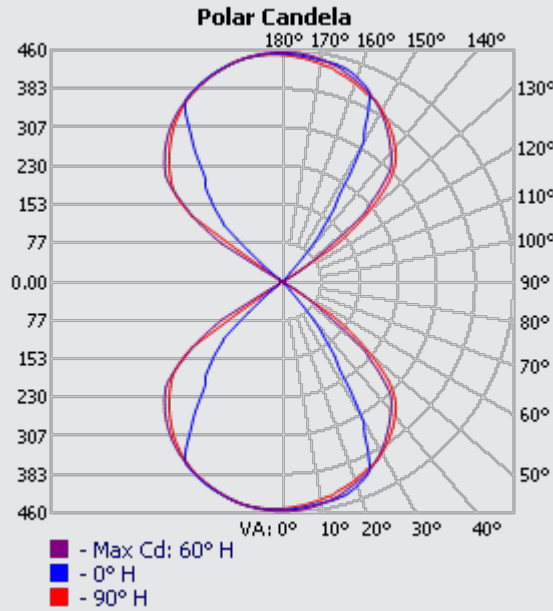


ILLUMINANCE AT A DISTANCE

Height	Center Beam fc	Beam Width (V / H)
4.0 ft	28.34 fc	6.0 / 10.1 ft
8.0 ft	7.08 fc	12.0 / 20.2 ft
12.0 ft	3.15 fc	18.1 / 30.4 ft
16.0 ft	1.77 fc	24.1 / 40.5 ft
20.0 ft	1.13 fc	30.1 / 50.6 ft

Vertical Spread: 73.9° | Horizontal Spread: 103.4°

Dimensions

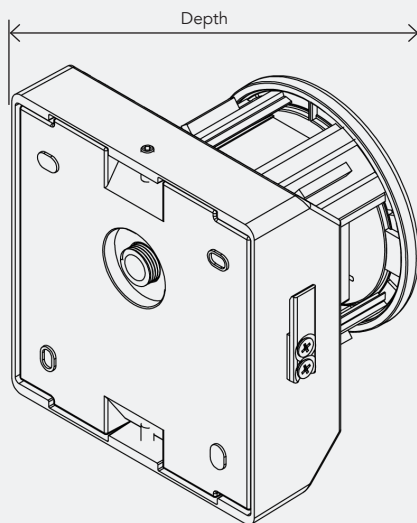

Width: 5.12" (130 mm)

Depth: 3.94" (100 mm)

Height: 5.51" (140 mm)

Weight: 3 lbs (1.56 kgs)

