


Date: \_\_\_\_\_ Project: \_\_\_\_\_

Type: \_\_\_\_\_ Part #: \_\_\_\_\_

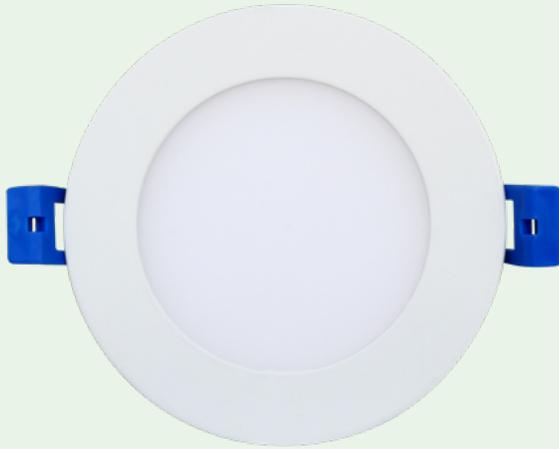

# Brilliance

## 4" SLIM Recessed Downlight

Brighten your living room, kitchen, or bathroom with the Brilliance Series recessed downlights. With its multi-CCT feature, you can easily adjust the lighting ambiance to suit your preference. The round design and white finish blend seamlessly with any decor, providing a modern and clean aesthetic. Easy installation with high-quality mounting spring, quick connectors, and included junction box. The premium aluminum body of this LED slim panel ensures superior durability and aesthetics compared to plastic options. Say goodbye to yellowing with age.



## Product Features

- JA8 compliant
- FT4-Rated Cable
- Polycarbonate and Aluminum body
- Plastic Satin Lens
- IC-rated and Air-Tight ready and may be in direct contact with insulation
- Compatible with Soffit installations and can be installed in shallow plenum spaces
- Flicker-free 120V forward-phase triac dimming down to 10%
- Wet location suitable IP54
- Operating temperature: -4°F to +104°F (-20°C to +40°C)
- Rated Lifespan: L70 ~50,000 hrs
- 5 year warranty

## Specifications


<b>Voltage</b>	120V AC
<b>Wattage</b>	12W
<b>Power Factor</b>	>0.9
<b>Selectable CCT</b>	2700K, 3000K, 3500K, 4000K, 5000K
<b>CRI</b>	>80
<b>Lumens</b>	up to 966 lm
<b>Beam Angle</b>	120°
<b>Dimming</b>	TRIAC 120V (forward phase)
<b>Mounting</b>	Recessed
<b>Applications</b>	Commercial, Residential, Retail Facilities
<b>Certifications</b>	cETLus, JA8

## Specifications – R1

Order #	Model #	Voltage	Wattage	Delivered Lumens	CCT	Efficacy
<b>R36020</b>	RENO-4-S12W-MCCT-WH-ECO	120V	12W	792 lm	2700K	66 lm/W
				911 lm	3000K	76 lm/W
				951 lm	3500K	79 lm/W
				966 lm	4000K	80 lm/W
				872 lm	5000K	72 lm/W


## Photometrics

4" Slim ECO 3500K 12W

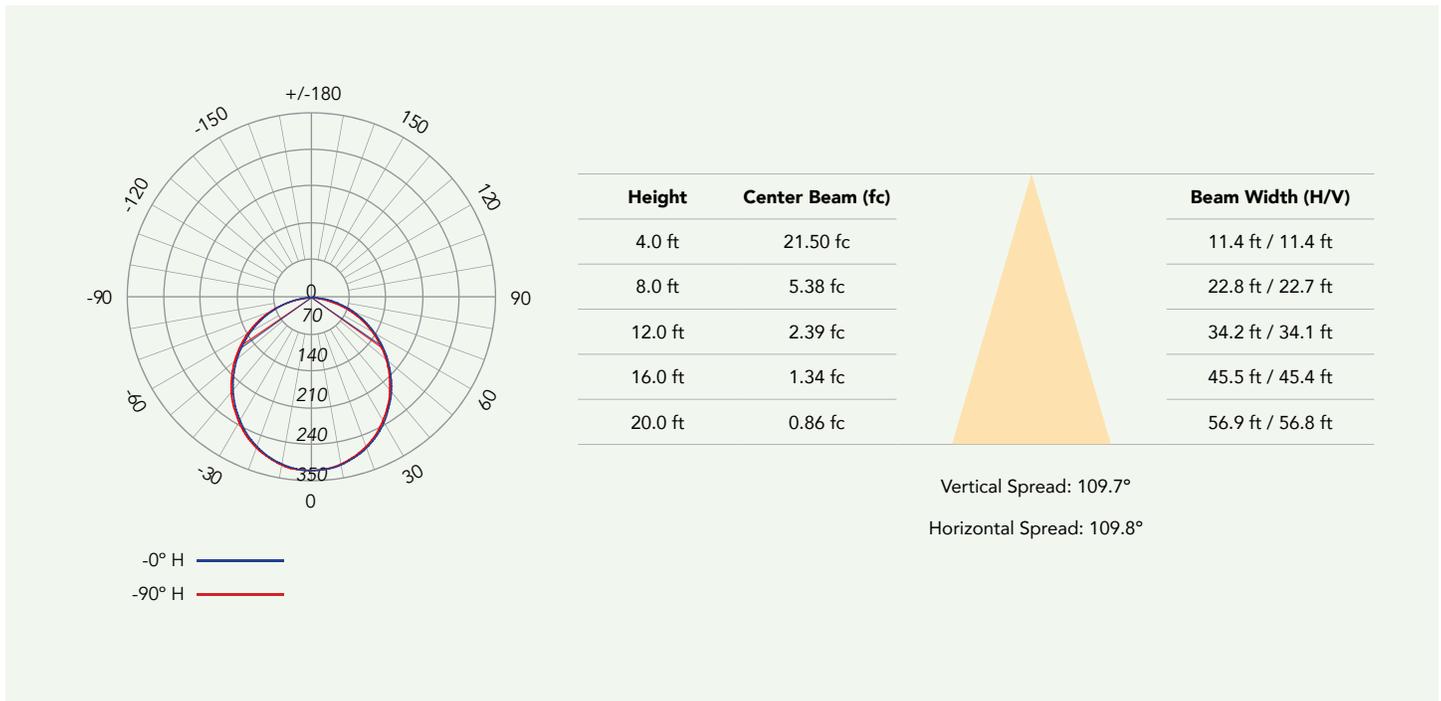

## Accessories

### Mounting



R39101  
RENO-4-GR  
4" Goof Ring




R39108  
RENO-MP4  
Mounting Plate

## Specifications

Order #	Model #	Size	Type	Description
<b>R39101</b>	RENO-4-GR	Ø 4"	Goof Ring	Goof Ring for 4" Recessed Downlight (Ø 4"/108mm)
<b>R39108</b>	RENO-MP4	13"x 17"	Mounting Plate	13" x 7" Mounting Plate (330.2mm x 177.8mm)

## Dimensions

### 4" Slim ECO Recessed Downlight

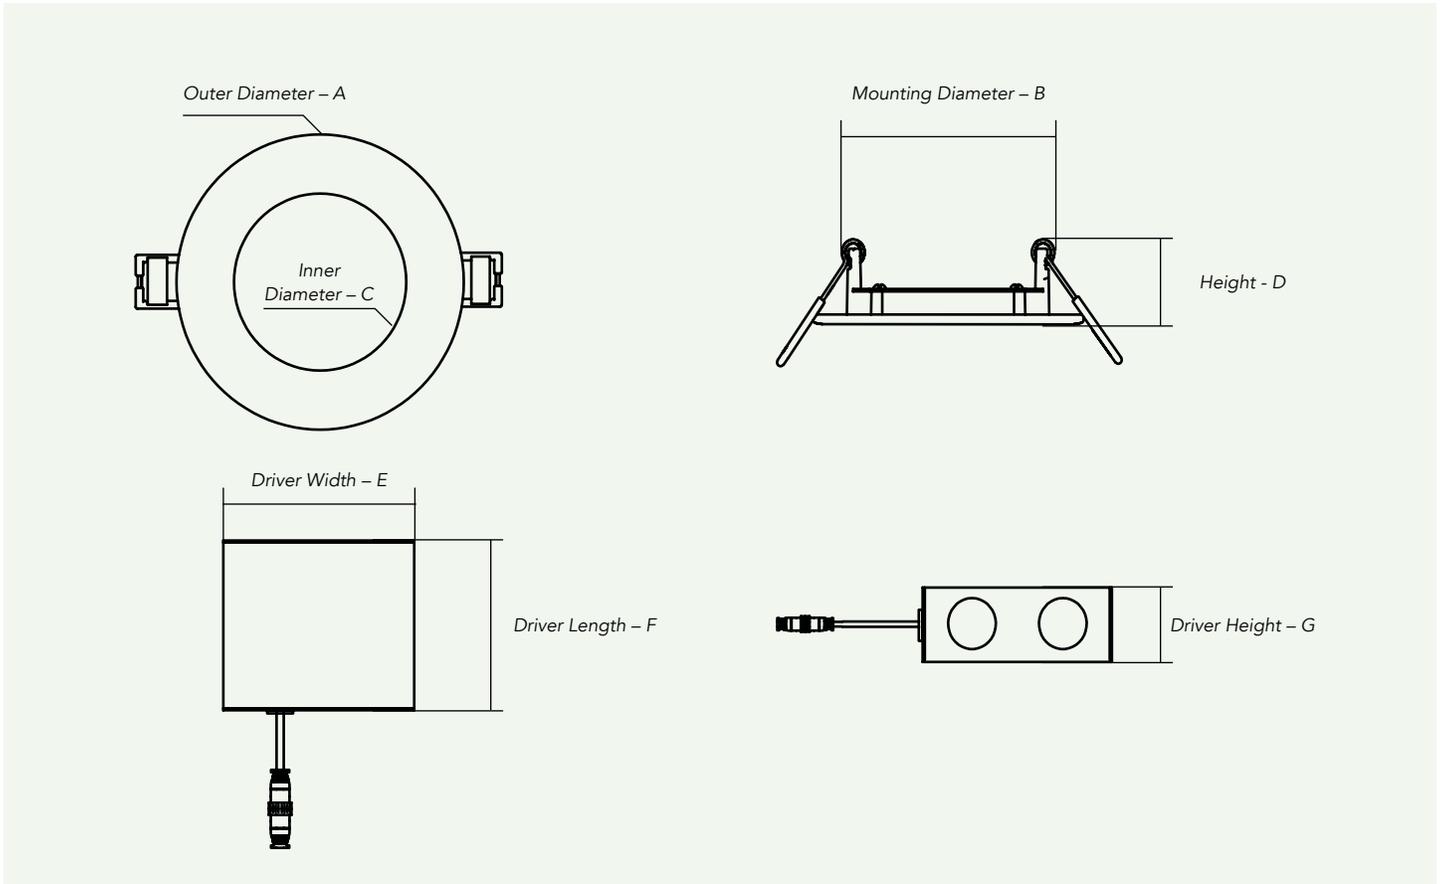

4" Slim ECO	
<b>Outer Diameter - A</b>	5.00"   127 mm
<b>Mounting Diameter - B</b>	4.25"   108 mm
<b>Inner Diameter - C</b>	3.1875"   81 mm
<b>Height - D</b>	0.8125"   21 mm
<b>Driver Width - E</b>	2.6875"   69 mm
<b>Driver Length - F</b>	0.125"   105 mm
<b>Driver Height - G</b>	1.375"   34 mm