
Date: _____ Project: _____

Type: _____ Part #: _____

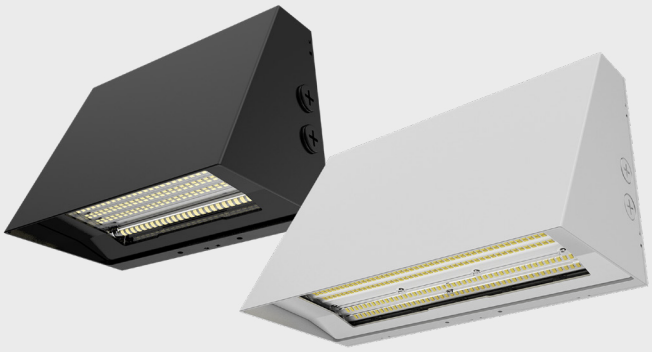

Ops

Architectural Slim Full Cut off Wall Pack

The OPS Slim Architectural Wall Pack combines sleek, low-profile design with versatile performance for a wide range of exterior applications.

Featuring BeamFlex™ Technology with field-adjustable Type II to Type IV distributions, selectable 3000K–5000K CCT, and field-adjustable wattage, OPS delivers the ideal balance of efficiency, flexibility, and architectural aesthetics. Available in three sizes.

BEAM FLEX™

Product Features

- Die-cast aluminum body
- Polycarbonate Lens
- Black and white finishes (custom finishes available)
- Available in 3 sizes
- BeamFlex™ Field-adjustable switch for distribution T2/T3/T4
- Field-adjustable wattages
- Built in photocell
- IP 65
- 4 kV Surge Protection (R1: 40W)
- 6 kV Surge Protection (R2& R3: 100W & 150W)
- DarkSky (3000K)
- Operating temp: -40°C to +50°C (-40°F to +122°F)
- Rated Lifetime L70 >100,000 hrs
- 10-Year Limited Warranty

Specifications

Voltage	120-347V AC
Selectable Wattages	R1: 25/30/40W R2: 60/80/100W R3: 90/120/150W
Selectable CCT	3000K, 4000K, 5000K
THD	< 20%
Power Factor	> 0.9
CRI	80
Lumens	R1: Up to 5,653 lm R2: Up to 14,210 lm R3: Up to 24,748 lm
Efficacy	R1: Up to 146 lm/W R2: Up to 147 lm/W R3: Up to 186 lm/W
Beam Angle	T2, T3, T4
Dimming	0-10V
Mounting	Wall Mounting
Applications	Commercial & Industrial Buildings, Parking, Walkways, Multi-Residential & Hospitality

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Specifications

Order#	Model#	Finish	Wattage	Lumens	Efficacy	CCT	Beam Angle
R51210	RENO-SFWP-DV-MCCT-ABA-G2-R1-BK	Black	25/30/40W	Up to 5,653 lm	Up to 146 lm/W	30/40/5000K	T2/T3/T4
R51211	RENO-SFWP-DV-MCCT-ABA-G2-R1-WH	White	25/30/40W	Up to 5,653 lm	Up to 146 lm/W	30/40/5000K	T2/T3/T4
R51212	RENO-SFWP-DV-MCCT-ABA-G2-R2-BK	Black	60/80/100W	Up to 14,210 lm	Up to 147 lm/W	30/40/5000K	T2/T3/T4
R51213	RENO-SFWP-DV-MCCT-ABA-G2-R2-WH	White	60/80/100W	Up to 14,210 lm	Up to 147 lm/W	30/40/5000K	T2/T3/T4
R51214	RENO-SFWP-DV-MCCT-ABA-G2-R3-BK	Black	90/120/150W	Up to 24,748 lm	Up to 186 lm/W	30/40/5000K	T2/T3/T4
R51215	RENO-SFWP-DV-MCCT-ABA-G2-R3-WH	White	90/120/150W	Up to 24,748 lm	Up to 186 lm/W	30/40/5000K	T2/T3/T4

DLC Certification

Order#	Model#	Application	DLC Standard	DLC Premium
R51210	RENO-SFWP-DV-MCCT-ABA-G2-R1-BK	Outdoor Zero-Uplight Wall-Mounted Area Luminaire	S-LVTCH2	-
R51211	RENO-SFWP-DV-MCCT-ABA-G2-R1-WH	Outdoor Zero-Uplight Wall-Mounted Area Luminaire	S-LVTCH2	-
R51212	RENO-SFWP-DV-MCCT-ABA-G2-R2-BK	Outdoor Zero-Uplight Wall-Mounted Area Luminaire	-	S-CRMVC9
R51213	RENO-SFWP-DV-MCCT-ABA-G2-R2-WH	Outdoor Zero-Uplight Wall-Mounted Area Luminaire	-	S-CRMVC9
R51214	RENO-SFWP-DV-MCCT-ABA-G2-R3-BK	Outdoor Zero-Uplight Wall-Mounted Area Luminaire	-	S-VVBK0Z
R51215	RENO-SFWP-DV-MCCT-ABA-G2-R3-WH	Outdoor Zero-Uplight Wall-Mounted Area Luminaire	-	S-VVBK0Z

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Light Distribution R1

Wattage	3000K			4000K			5000K		
	T2	T3	T4	T2	T3	T4	T2	T3	T4
25W	3,387.1 lm	3,245.9 lm	3,171.9 lm	3,580.0 lm	3,380.7 lm	3,274.7 lm	3,559.1 lm	3,420.5 lm	3,338.0 lm
	135.4 lm/W	129.8 lm/W	126.8 lm/W	143.2 lm/W	135.2 lm/W	130.9 lm/W	142.3 lm/W	136.8 lm	133.5 lm/W
30W	4,114.3 lm	3,965.5 lm	3,864.4 lm	4,392 lm	4,243.5 lm	4,102.4 lm	4,353.1 lm	4,073.9 lm	4,036.0 lm
	137.1 lm/W	132.1 lm/W	128.8 lm/W	146.4 lm/W	141.4 lm/W	136.7 lm/W	145.1 lm/W	135.7 lm/W	134.5 lm/W
40W	5,339.1 lm	5,018.6 lm	4,979.0 lm	5,653 lm	5,322.7 lm	5,093.5 lm	5,568.5 lm	5,308.4 lm	5,225.0 lm
	133.4 lm/W	125.4 lm/W	124.4 lm/W	141.3 lm/W	133.0 lm/W	127.3 lm/W	139.2 lm/W	132.7 lm/W	130.6 lm/W

Light Distribution R2


Wattage	3000K			4000K			5000K		
	T2	T3	T4	T2	T3	T4	T2	T3	T4
60W	8,284.9 lm	8,292.9 lm	8,152.4 lm	8,833.7 lm	8,760.4 lm	8,538.9 lm	8,672.7 lm	8,737.5 lm	8,522.7 lm
	138.0 lm/W	138.2 lm/W	135.8 lm/W	147.2 lm/W	146.0 lm/W	142.3 lm/W	144.5 lm/W	145.6 lm/W	142.0 lm/W
80W	10,704.9 lm	10,906.2 lm	10,494.5 lm	11,555.3 lm	10,906.2 lm	11,056.7 lm	11,209.1 lm	11,267.3 lm	10,982.0 lm
	133.8 lm/W	136.3 lm/W	131.1 lm/W	144.4 lm/W	146.5 lm/W	138.2 lm/W	140.1 lm/W	140.8 lm/W	137.2 lm/W
100W	12,919.4 lm	13,126.7 lm	12,709.5 lm	14,209.7 lm	14,103.5 lm	13,573.8 lm	13,787.6 lm	13,920.8 lm	13,599.9 lm
	129.1 lm/W	131.2 lm/W	127.0 lm/W	142.0 lm/W	141.0 lm/W	135.7 lm/W	137.8 lm/W	139.2 lm/W	135.9 lm/W

Light Distribution R3


Wattage	3000K			4000K			5000K		
	T2	T3	T4	T2	T3	T4	T2	T3	T4
90W	16,026.3 lm	15,176.8 lm	14,690.9 lm	16,714.7 lm	15,440.7 lm	14,884.4 lm	16,150.5 lm	15,443.0 lm	14,980.7 lm
	178.0 lm/W	168.6 lm/W	163.2 lm/W	185.7 lm/W	171.5 lm/W	165.3 lm/W	179.4 lm/W	171.5 lm/W	166.4 lm/W
120W	19,979.7 lm	19,147.4 lm	18,471.5 lm	20,846.4 lm	19,624.0 lm	18,844.6 lm	20,318.5 lm	19,480.8 lm	18,843.7 lm
	166.4 lm/W	159.5 lm/W	153.9 lm/W	173.7 lm/W	163.5 lm/W	157.0 lm/W	169.3 lm/W	162.3 lm/W	157.0 lm/W
150W	23,389.5 lm	22,534.6 lm	21,581.3 lm	24,748.1 lm	23,358.5 lm	22,182.2 lm	23,772.4 lm	22,976.7 lm	22,296.2 lm
	155.9 lm/W	150.2 lm/W	143.8 lm/W	164.9 lm/W	155.7 lm/W	147.8 lm/W	158.4 lm/W	153.178 lm/W	148.6 lm/W

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.


Distribution T2 | T3 | T4

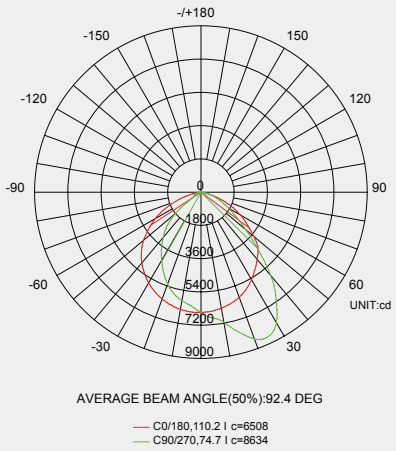

T2

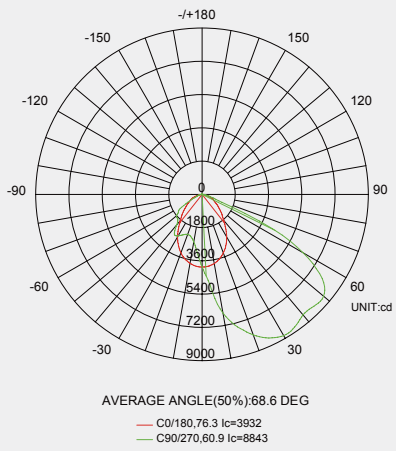

T3

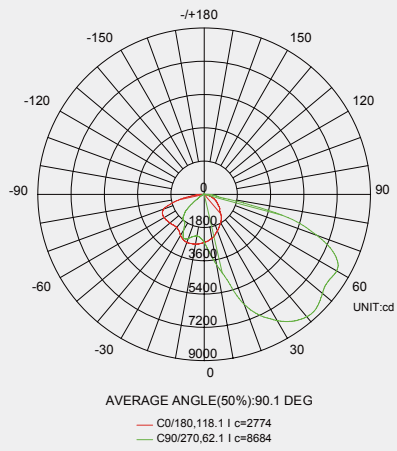

T4

BeamFlex™

RENO Optical Technology Platform

BeamFlex™ is Reno Lighting's proprietary optical technology platform providing field-selectable beam distribution integrated within the luminaire. Beam angles are adjustable on site during installation or commissioning, eliminating the need for factory-specified fixed optics or post-installation optic replacement.




Type II (T2)

Light Distribution

Narrow Forward Distribution

Walkways, Side Paths, Alleys, Building Perimeters




Type III (T3)

Light Distribution

Balanced Forward/Lateral Distribution

Parking areas, Building Exteriors, Wide Pathways, Commercial Sites



Type IV (T4)

Light Distribution


Wide Forward Distribution

Large Perimeter Areas, Building Facades, Loading and Docking Areas, Open Spaces

All Rights Reserved © Renolighting (905) 604-4666 I sales@renolighting.com I www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.

Dimensions

Ops R1 | R2 | R3

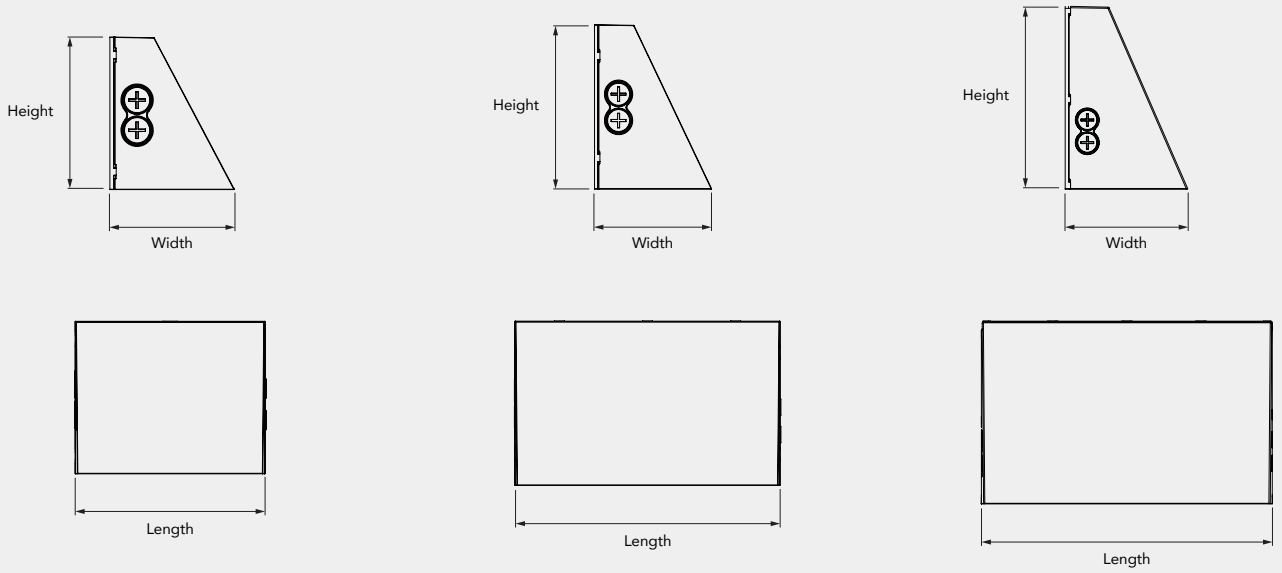

OPS R1 **OPS R2** **OPS R3**

Model	Ops 9"	Ops 14"	Ops 17"
Length	8.3" | 211 mm	13.34" | 339 mm	16.92" | 430 mm
Width	5.43" | 138 mm	5.86" | 149 mm	7.12" | 181 mm
Height	6.69" | 170 mm	8.26" | 210 mm	10.62" | 270 mm
Weight	1.89KG/4.17lbs	2.91kg/6.42lbs	4.81kg/10.6lbs

All Rights Reserved © Renolighting (905) 604-4666 | sales@renolighting.com | www.renolighting.com
Reno Lighting reserves the right to change this product and related instructions without notice.
Refer to the product page for the latest information.