

Date: _____ Project: _____

Type: _____ Part #: _____



AURA Series

Recessed Downlight

The Prime Square Commercial Downlight is a versatile, economical LED solution designed for ultimate site adaptability. Featuring field-adjustable lumen output and color temperature, this series comes in 4", 6", and 8" configurations.

Engineered for performance, each unit offers 80 or 90 CRI options and universal 120–347V voltage compatibility.



Product Features

- Durable Aluminum Body
- Type IC, Air-Tight & Wet - No Housing Required
- Fast Installation & No Junction Box Needed
- Includes two spring-loaded clips to attach to any ceiling material.
- 100%-10% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- Rated for long life - over 50,000 hours

Specifications

Input Voltage	120V
Wattage	8W
Selectable CCT	27/30/35/40/5,000K
Power factor	>0.9
CRI	90Ra+
Lumen	656.3lm
Efficacy	Up to 88.75lm/W
Beam Angle	38°
Dimming	0-10V/Triac/ELV
Mounting	Recessed
Applications	Commercial buildings, Hospitality, Offices, Lobbies
Default Settings	3,000K

Specifications - 2in Round Commercial Downlight (White)

Order #	Model	Voltage	Wattage	Lumen	Efficacy	CCT
R36131	RENO-LED-AURA-2-S8W-5CCT-WH	120V	8W	661.4 lm	82.6 lm/W	2,700K
				687.8 lm	85.9 lm/W	3,000K
				714.6 lm	89.3 lm/W	3,500K
				726.3 lm	90.7 lm/W	4,000K
				720.1 lm	90.0 lm/W	5,000K

Specifications - 2in Round Commercial Downlight (Black)

Order #	Model	Voltage	Wattage	Lumen	Efficacy	CCT
R36132	RENO-LED-AURA-2-S8W- 5CCT-BK	120V	8W	620.3 lm	77.5 lm/W	2,700K
				643.3 lm	80.4 lm/W	3,000K
				674.9 lm	84.3 lm/W	3,500K
				687.4 lm	85.9 lm/W	4,000K
				682.1 lm	85.2 lm/W	5,000K

2in Square Commercial Downlight (White)

Order #	Model	Voltage	Wattage	Lumen	Efficacy	CCT
R36133	RENO-LED-AURA-2-S8W-5CCT-WH-SQ	120V	8W	656.1 lm	82.0 lm/W	2,700K
				685.6 lm	85.7 lm/W	3,000K
				712.3 lm	89.0 lm/W	3,500K
				724.1 lm	90.5 lm/W	4,000K
				720.2 lm	90.0 lm/W	5,000K

2in Square Commercial Downlight (Black)


Order #	Model	Voltage	Wattage	Lumen	Efficacy	CCT
R36134	RENO-LED-AURA-2-S8W-5CCT-BK-SQ	120V	8W	628.4 lm	78.5 lm/W	2,700K
				651.7 lm	81.4 lm/W	3,000K
				684.7 lm	85.5 lm/W	3,500K
				699.0 lm	87.3 lm/W	4,000K
				698.4 lm	87.3 lm/W	5,000K

DLC Certification

Order #	Model	Application	DLC Standard	DLC Premium
R36131	RENO-LED-AURA-2-S8W-5CCT-WH	-	-	-
R36132	RENO-LED-AURA-2-S8W-5CCT-BK	-	-	-
R36133	RENO-LED-AURA-2-S8W-5CCT-WH-SQ	-	-	-
R36134	RENO-LED-AURA-2-S8W-5CCT-BK-SQ	-	-	-


Dimensions

Aura Recessed Downlight | Round

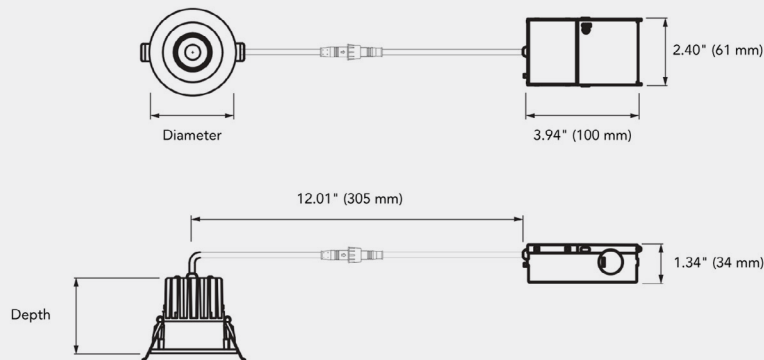

Order #	Model	Diameter	Depth	Cut Hole Size
R36131	RENO-LED-AURA-2-S8W-5CCT-WH	3.15in (80 mm)	2.76in (70 mm)	2.83in (72 mm)
R36132	RENO-LED-AURA-2-S8W- 5CCT-WH	3.15in (80 mm)	2.76in (70 mm)	2.83in (72 mm)

Aura Recessed Downlight | Square

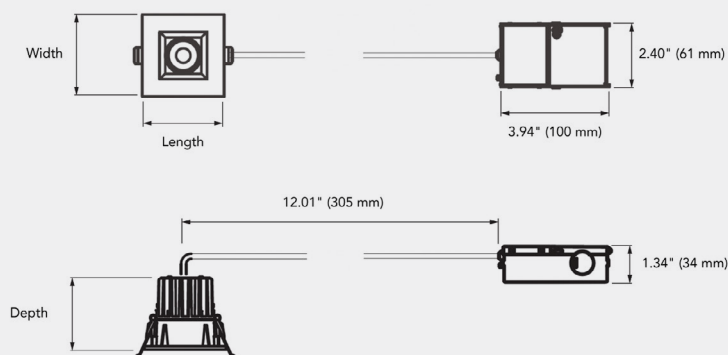

Order #	Model	Length	Width	Depth	Cut Hole Size
R36133	RENO-LED-AURA-2-S8W-5CCT-WH	3.15in (80 mm)	3.15in (80 mm)	2.76in (70 mm)	2.83in (72 mm)
R36134	RENO-LED-AURA-2-S8W- 5CCT-WH	3.15in (80 mm)	3.15in (80 mm)	2.76in (70 mm)	2.83in (72 mm)