


Date: _____ Project: _____

Type: _____ Part #: _____

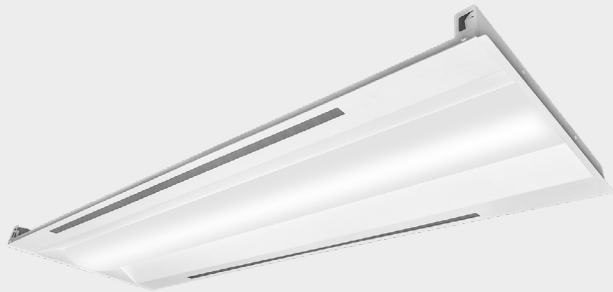

Luxor Series

Metric Center Basket Troffer with Optional Air Return

The Luxor Series Air Return Metric Troffer is perfect for shallow plenum, metric-sized drop ceilings. It combines sleek, modern design with advanced LED technology to provide bright, even illumination while reducing energy costs. Its optional built-in air return feature enhances HVAC system efficiency, making it a smart choice for commercial and industrial applications. Durable, low-maintenance, and eco-friendly, it's the perfect solution for any modern workspace.



Product Features

- Easy lay-in installation to fit 500mm x 1,500mm metric ceiling systems
- Optional Air Return Vents promote optimal air circulation and quality, while reducing the number of unsightly ceiling vents, providing a cleaner overall aesthetic
- Sensor-ready knockout compatible with our standalone sensor or Reno Bluetooth System
- Flicker-free design reduces eye fatigue
- Frosted polycarbonates lens diffuser provides even illumination
- Steel body construction with white powder coat finish
- Can be used as an emergency backup unit powered by the RENO-EM-H15 Emergency LED Driver
- 0-10V dimming control compatible
- Operating temperature: -4°F to +104°F (-20°C to +40°C)
- Rated Lifespan: L70 ~100,000 hrs
- 10 Years Warranty

Specifications

Input Voltage	120-347V
Selectable Wattage	30/40/50/60/70W
Selectable CCT	27/30//35//40/5000K
Power factor	>0.9
THD	<20%
CRI	90
Lumen	Up to 9,562 lm
Efficacy	Up to 148 lm/W
Beam Angle	>120°
Dimming	0-10V
Mounting	Metric Ceiling Systems
Applications	Commercial, Offices, Education Institutes, Healthcare Facilities, Retail Facilities

Specifications - Metric Center Basket Troffer with Optional Air Return

Order #	Model	Voltage	Wattage	Lumen	Efficacy	CCT
R35409	RENO-2060CTF-UNV/347-MWMCCT-HL	120-347V	30 W	4,237.4 lm	141.2 lm/W	2,700 K
				4,281.2 lm	142.7 lm/W	3,000 K
				4,317.0 lm	143.9 lm/W	3,500 K
				4,362.2 lm	145.4 lm/W	4,000 K
				4,433.2 lm	147.8 lm/W	5,000 K
			40W	5,499.6 lm	137.5 lm/W	2,700 K
				5,596.4 lm	139.9 lm/W	3,000 K
				5,652.1 lm	141.3 lm/W	3,500 K
				5,724.0 lm	143.1 lm/W	4,000 K
				5,808.3 lm	145.2 lm/W	5,000 K
			50W	6,643.9 lm	132.9 lm/W	2,700 K
				6,775.0 lm	135.5 lm/W	3,000 K
				6,918.8 lm	138.4 lm/W	3,500 K
				6,945.3 lm	138.9 lm/W	4,000 K
				7,073.0 lm	141.5 lm/W	5,000 K
			60W	8,018.4 lm	133.6 lm/W	2,700 K
				8,039.9 lm	134.0 lm/W	3,000 K
				8,132.5 lm	135.5 lm/W	3,500 K
				8,224.1 lm	137.1 lm/W	4,000 K
				8,343.1 lm	139.1 lm/W	5,000 K
			70W	9,154.9 lm	130.8 lm/W	2,700 K
				9,278.2 lm	132.5 lm/W	3,000 K
				9,327.6 lm	133.3 lm/W	3,500 K
				9,401.4 lm	134.3 lm/W	4,000 K
				9,562.6 lm	136.6 lm/W	5,000 K

DLC Certification

Order #	Model	Application	DLC Standard	DLC Premium
R35409	RENO-2060CTF-UNV/347-MWMCCT-HL	High-Bay Luminaires for Commercial and Industrial Buildings	S-56WFY3	-


Charts

Light Distribution



Accessories

Emergency Driver



Emergency LED Driver

R83001

RENO-EM-H15

Order #	Model	Description
R83001	RENO-EM-H15	External Mount 15W 100-347Vac 50/60Hz 0.1A max 12W max 170V DC 5°C ~50°C

Accessories

Standalone Sensors



PIR Sensor

R74001

RENO-SENSOR-PIR-H



5-Key Reset Remote

R75003

RENO-RS-BPRN-12V

Order #	Model	Description
R74001	RENO-SENSOR-PIR-H	12VDC Max 13' height, 20' radius Bi-level/ON-OFF For LED Troffers * Remote required to custom-configure sensor settings.*
R75003	RENO-RS-BPRN-12V	Bluetooth PIR Sensor for Troffers and Flat Panelsconfigure Settings. **Requires Reno Smart App to configure Settings*

Remotes




Remote Control for Standalone Sensors (With Screen)

Note: Only 1 needed per project.

R73002

RENO-REMOTE-H



Remote Control for Standalone sensors (Without Screen)

Note: Only 1 needed per project


R73005

RENO-REMOTE-H-ECO

Order #	Model	Description
R73002	RENO-REMOTE-H	Remote Control for Standalone Sensors (With Screen) Note: Only 1 needed per project
R73005	RENO-REMOTE-H-ECO	Remote Control for Standalone Sensors (Without Screen) Note: Only 1 needed per project

Dimensions

Metric Center Basket Troffer with Optional Air Return

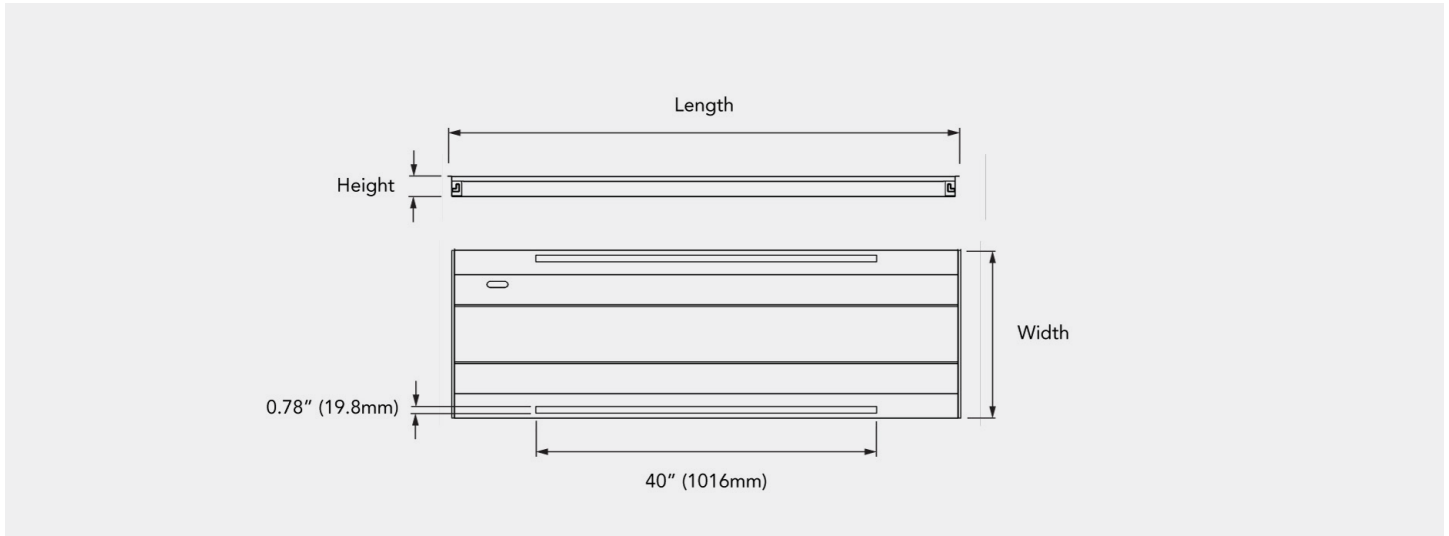

Order #	Model	Length	Width	Height	Weight
R35409	RENO-2060CTF-UNV/347-MWMCCT-HL	59.25" (1505 mm)	19.69" (500 mm)	2.36" (59.94 mm)	9.22 kg/20.3lbs