




TELAIO Series

Pre-Assembled Grid Frame Light

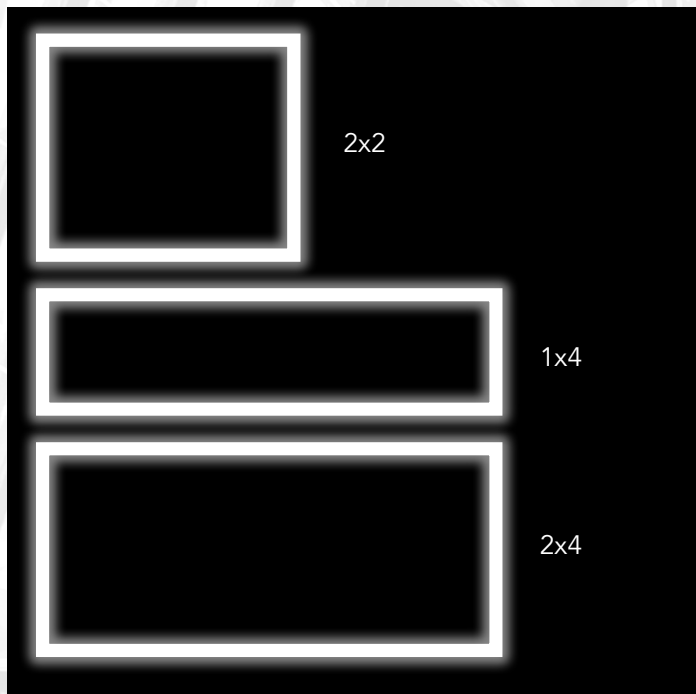

Product Features

- One piece pre-assembled frame out-of-the-box, ready to install
- Five selectable wattages and CCTs per SKU
- Smooth, continuous lighting distribution with reduced glare (as low as 18.7 UGR)
- Drops into standard T-grids while accommodating existing ceiling tiles
- White aluminum frame with polycarbonate lens
- Unique zero-distance back cover and frame design for enhanced dustproof protection
- Lightweight design ensures each fixture is less than 3 lbs
- Remote driver easily mounts onto T-bar grid using included clip
- 2kVA Surge Protection
- Operating temp: -40°F to 113°F (-40°C to 45°C)
- Rated lifetime L70: >100,000 hours
- 10 Year Limited Warranty

Date		Project	
Type		Part Number	

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

Elevate your interior with the TELAIO SERIES Pre-Assembled Grid Frame Light, crafted to bring a modern touch to any grid ceiling. Its pre-assembled design ensures seamless integration into standard grid systems, offering an innovative solution with smooth, fully luminous light distribution. Designed to fit perfectly within T-bar ceilings while accommodating the existing acoustic tile on top—no trimming needed—it's the ultimate blend of efficiency and sophistication.



Key Specifications

Voltage	120-347V
Sizes	1x4, 2x2, and 2x4
Wattage	Selectable Wattages 1x4: 20/25/30/35/40W 2x2: 20/25/30/35/40W 2x4: 30/35/40/45/50W
CCT	Selectable CCT 30/35/40/50/6500K
Efficacy	Up to 133lm/W
CRI	80
Dimming	0-10V Continuous Dimming to 5%
Beam Angle	120°
UGR	As low as 18.7
Power Factor	>0.9
THD	<20%
Mounting	T-Grid
Applications	Commercial, Retail Stores, Office Buildings





TELAIO Series | Pre-Assembled Grid Frame Light

ARCHITECTURAL LUMINAIRES BY  RENO[™] LIGHTING

Specifications - 1x4

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT	UGR
R35111	RENO-14GFL-DV-MCCT-MW	20W	120-347V	2,580 lm	129 lm/W	3000K	20
				2,600 lm	130 lm/W	3500K	
				2,620 lm	131 lm/W	4000K	
				2,640 lm	132 lm/W	5000K	
				2,660 lm	133 lm/W	6500K	
		25W	120-347V	3,225 lm	129 lm/W	3000K	21
				3,250 lm	130 lm/W	3500K	
				3,275 lm	131 lm/W	4000K	
				3,300 lm	132 lm/W	5000K	
				3,325 lm	133 lm/W	6500K	
		30W	120-347V	3,840 lm	128 lm/W	3000K	21.7
				3,870 lm	129 lm/W	3500K	
				3,900 lm	130 lm/W	4000K	
				3,930 lm	131 lm/W	5000K	
				3,960 lm	132 lm/W	6500K	
		35W	120-347V	4,445 lm	127 lm/W	3000K	22.1
				4,480 lm	128 lm/W	3500K	
				4,515 lm	129 lm/W	4000K	
				4,550 lm	130 lm/W	5000K	
				4,585 lm	131 lm/W	6500K	
		40W	120-347V	5,080 lm	127 lm/W	3000K	22.5
				5,120 lm	128 lm/W	3500K	
				5,120 lm	128 lm/W	4000K	
				5,200 lm	130 lm/W	5000K	
				5,200 lm	130lm/W	6500K	

*UGR Settings shown using 4000K





TELAIO Series | Pre-Assembled Grid Frame Light

ARCHITECTURAL LUMINAIRES BY  RENO[™]
LIGHTING

Specifications - 2x2

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT	UGR
R35112	RENO-22GFL-DV-MCCT-MW	20W	120-347V	2,580 lm	129 lm/W	3000K	20
				2,600 lm	130 lm/W	3500K	
				2,620 lm	131 lm/W	4000K	
				2,640 lm	132 lm/W	5000K	
				2,660 lm	133 lm/W	6500K	
		25W	120-347V	3,225 lm	129 lm/W	3000K	20.7
				3,250 lm	130 lm/W	3500K	
				3,275 lm	131 lm/W	4000K	
				3,300 lm	132 lm/W	5000K	
				3,325 lm	133 lm/W	6500K	
		30W	120-347V	3,840 lm	128 lm/W	3000K	20.8
				3,870 lm	129 lm/W	3500K	
				3,900 lm	130 lm/W	4000K	
				3,930 lm	131 lm/W	5000K	
				3,960 lm	132 lm/W	6500K	
		35W	120-347V	4,445 lm	127 lm/W	3000K	21.8
				4,480 lm	128 lm/W	3500K	
				4,515 lm	129 lm/W	4000K	
				4,550 lm	130 lm/W	5000K	
				4,585 lm	131 lm/W	6500K	
		40W	120-347V	5,080 lm	127 lm/W	3000K	22.8
				5,120 lm	128 lm/W	3500K	
				5,120 lm	128 lm/W	4000K	
				5,200 lm	130 lm/W	5000K	
				5,200 lm	130lm/W	6500K	

*UGR Settings shown using 4000K





TELAIO Series | Pre-Assembled Grid Frame Light

ARCHITECTURAL LUMINAIRES BY  RENO[™] LIGHTING

Specifications - 2x4

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT	UGR
R35113	RENO-24GFL-DV-MCCT-MW	30W	120-347V	3,870 lm	129 lm/W	3000K	18.7
				3,900 lm	130 lm/W	3500K	
				3,930 lm	131 lm/W	4000K	
				3,960 lm	132 lm/W	5000K	
				3,990 lm	133 lm/W	6500K	
		35W	120-347V	4,515 lm	129 lm/W	3000K	19.1
				4,550 lm	130 lm/W	3500K	
				4,585 lm	131 lm/W	4000K	
				4,585 lm	131 lm/W	5000K	
				4,620 lm	132 lm/W	6500K	
		40W	120-347V	5,080 lm	127 lm/W	3000K	19.6
				5,200 lm	130 lm/W	3500K	
				5,240 lm	131 lm/W	4000K	
				5,240 lm	131 lm/W	5000K	
				5,280 lm	132 lm/W	6500K	
		45W	120-347V	5,715 lm	127 lm/W	3000K	20
				5,760 lm	128 lm/W	3500K	
				5,805 lm	129 lm/W	4000K	
				5,850 lm	130 lm/W	5000K	
				5,895 lm	131 lm/W	6500K	
		50W	120-347V	6,350 lm	127 lm/W	3000K	20.4
				6,350 lm	127 lm/W	3500K	
				6,400 lm	128 lm/W	4000K	
				6,400 lm	128 lm/W	5000K	
				6,450 lm	129 lm/W	6500K	

*UGR Settings shown using 4000K






TELAIO Series | Pre-Assembled Grid Frame Light

ARCHITECTURAL LUMINAIRES BY  **RENO**
LIGHTING

Accessories




R83001
RENO-EM-H15
Emergency LED Driver


Order#	Model	Description
R83001	RENO-EM-H15	External Mount Emergency Driver, 15W Output, ≥90 Minutes Operating Time

Dimensions

1x4

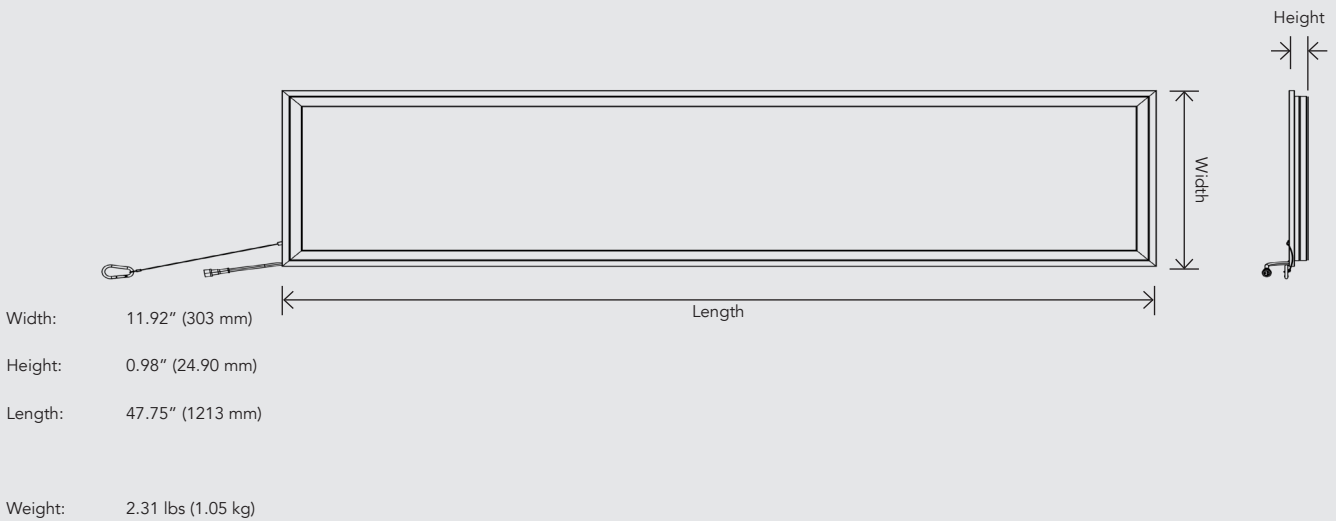

2x2

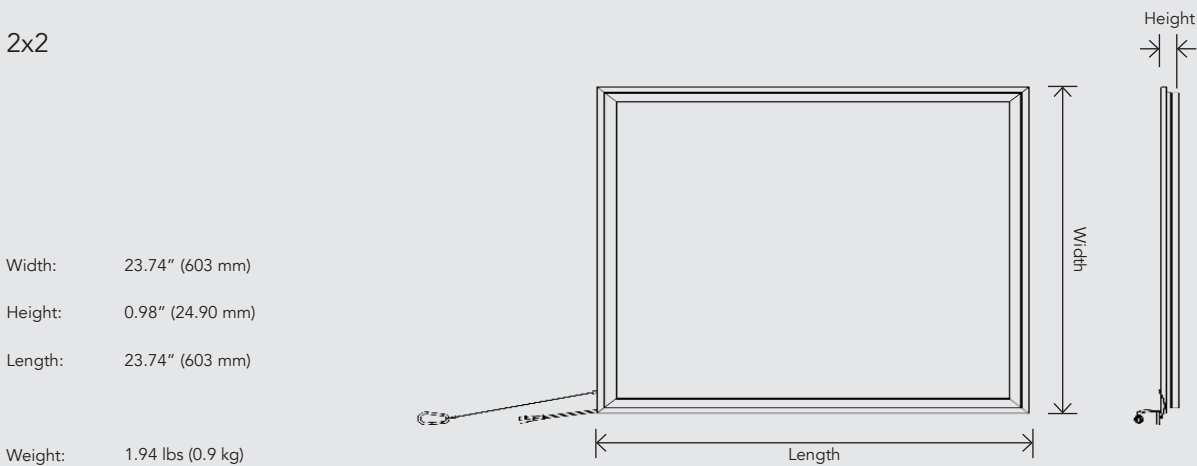





TELAIO Series | Pre-Assembled Grid Frame Light

ARCHITECTURAL LUMINAIRES BY  **RENO**
LIGHTING

2x4

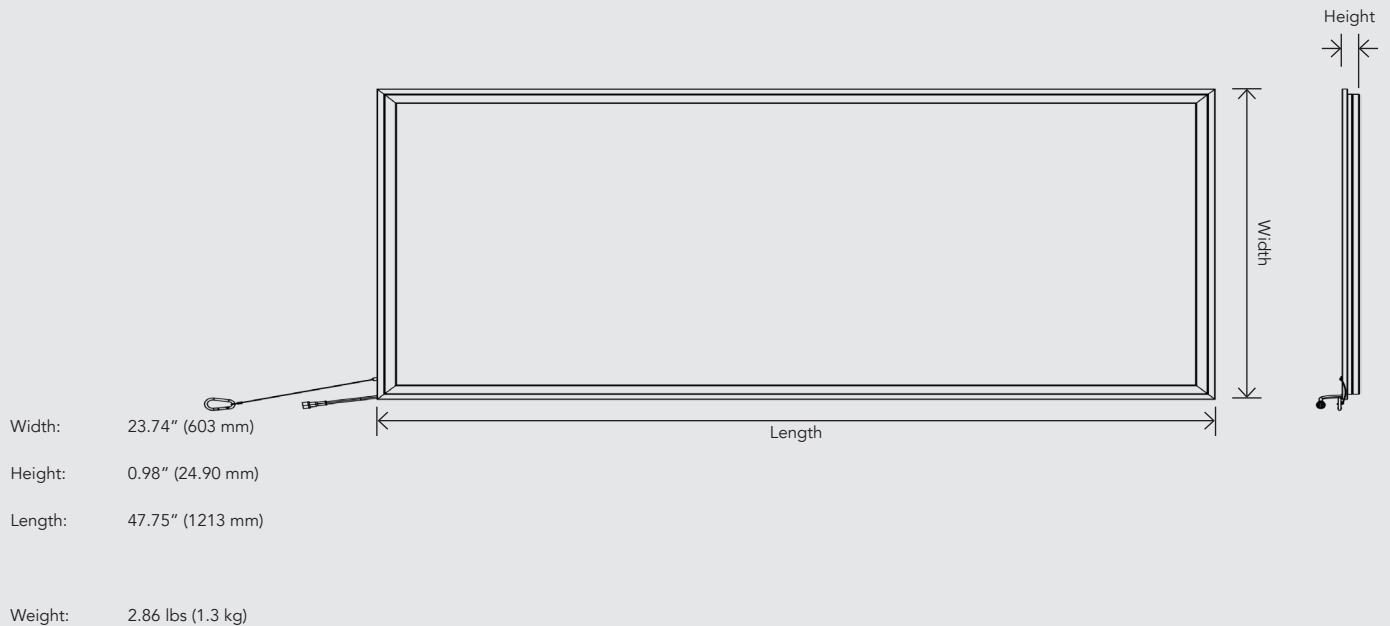

Fixture Driver (mounts on T-bar grid via clip)


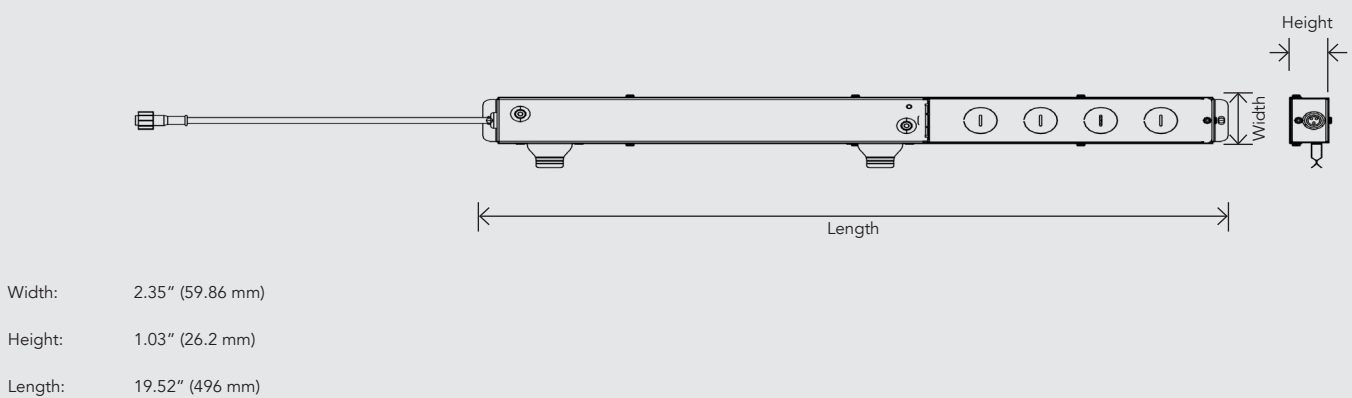






TELAIO Series | Pre-Assembled Grid Frame Light

ARCHITECTURAL LUMINAIRES BY RENO[™] LIGHTING

Photometrics 1'x4' - 40W/4000K

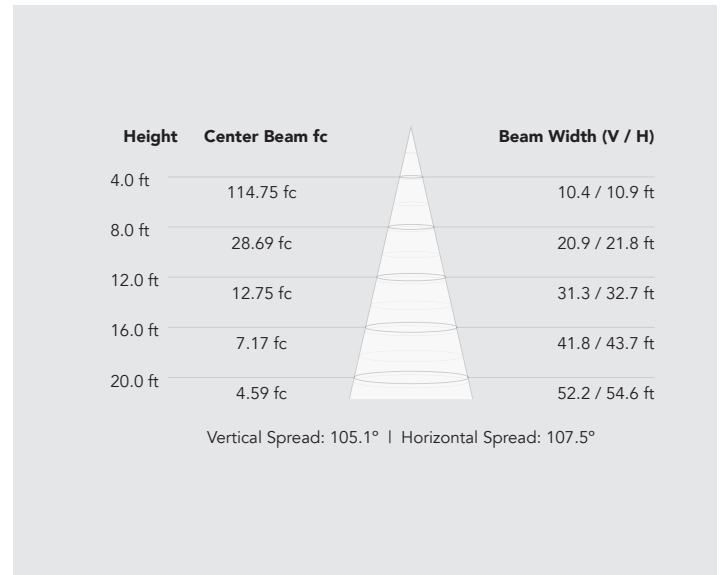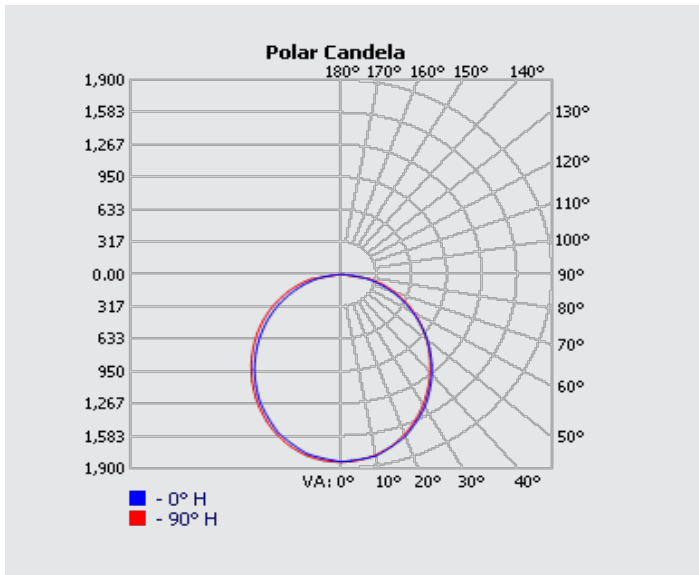

Photometrics 2'x2' - 40W/4000K

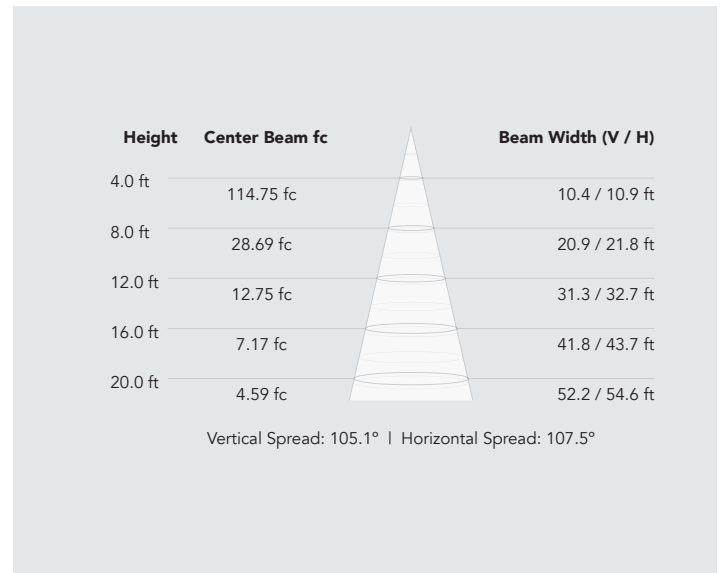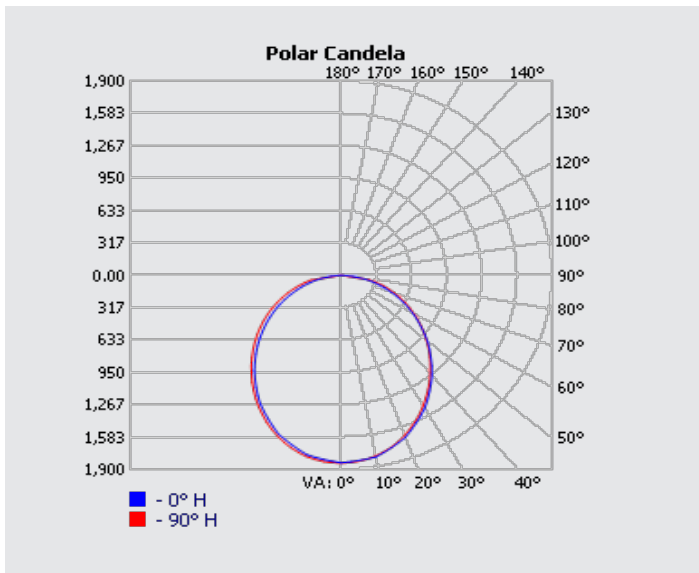



TELAIO Series | Pre-Assembled Grid Frame Light

ARCHITECTURAL LUMINAIRES BY  RENO[™] LIGHTING

Photometrics 2'x4' - 50W/4000K

