



Angle Adjustable L Converter


Wiring diagram

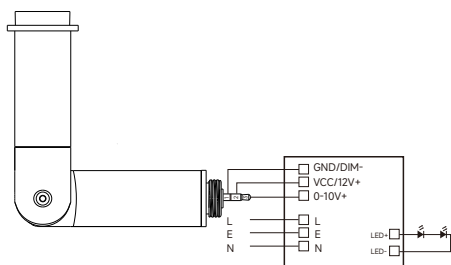

Optional cap

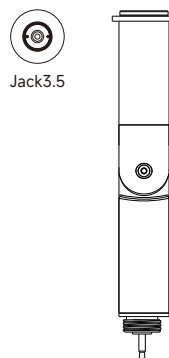

Installation

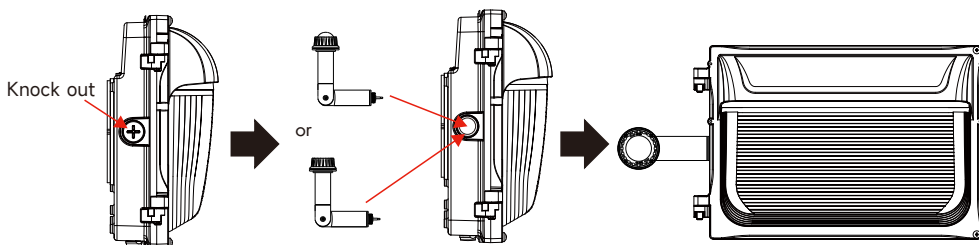

1. First, knock out the hole on the led wall pack light
2. Install the smart converter into the knock down hole and fix it with nuts.
3. Connect the corresponding wires as shown in the document wiring diagram.
4. Install the Bluetooth module required in the place of use into the converted jack interface.
5. Please disconnect all electrical connection

Attention:

Precautions

1. Turn the power off at the circuit breaker before installing the angle adjustable L converter.
2. This product installation requires handling 100-347volt wiring.
3. If any concerns handling wiring, hire a qualified electrician.
4. Ensure all work meets applicable local and national codes.



Important start-up information:

1. We reserve the right to necessarily modify any incorrect words or pictures or technical parameters.
2. Do not allow rework the Angle Adjustable L Converter without permission or authorization, otherwise the contract clauses guaranteed will be invalid immediately.
3. Contact TIOSL to get the detailed control setting guide.