

Date		Project	
Type		Part Number	

GEMINI Series

Cut Off Wall Pack

The GEMINI Series PRIME LED Cut-Off Wall Pack is a high performance fixture offering both durability and cutoff style. Fixture comes in rugged cast-luminum housing with excellent design. Highly efficient wall pack reduces light pollution and is perfect for areas designated with restrictive lighting zones by local ordinances.



PRODUCT FEATURES

- DLC Premium
- Polycarbonate Lens
- Die-Cast aluminum alloy housing
- Powder coated Bronze finish
- Custom Colours Available
- Operating temperature: -22°F to +122°F (-30°C to +50°C)
- IP65 Rated
- DC Photocell Included
- Rated Lifespan: L70 ~100,000 hrs
- 10 year limited warranty

KEY SPECIFICATIONS

Voltage	120-347V
Wattage	Selectable - R1 - 25W / 40W / 60W R2 - 80W / 100W / 120W
Power Factor	>0.9
CCT	Selectable: 3000K, 4000K, 5000K
CRI	>80
Lumens	Up to 17,390 lm
Beam Angle	T3
Dimming	0-10V
Mounting	Wall
Applications	Commercial, Self Storage, Entryways, Security Lighting



EMERGENCY
BACKUP READY

SPECIFICATIONS – R1 MULTI POWER (25/40/60W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R51012	RENO-CWP-60W-MW-DV-MCCT-R1	25W	120-347V	2857 lm	115 lm/W	3000K
				2939 lm	117.6 lm/W	4000K
				2939 lm	117.6 lm/W	5000K
		40W	120-347V	5548 lm	138.7 lm/W	3000K
				5645 lm	141.1 lm/W	4000K
				5420 lm	135.5 lm/W	5000K
		60W	120-347V	8283 lm	138.1 lm/W	3000K
				8155 lm	135.9 lm/W	4000K
				7666 lm	127.8 lm/W	5000K

SPECIFICATIONS – R2 MULTI POWER (80/100/120W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R51013	RENO-CWP-120W-MW-DV-MCCT-R2	80W	120-347V	11,790 lm	147.4 lm/W	3000K
				12,199 lm	152.5 lm/W	4000K
				11,799 lm	147.5 lm/W	5000K
		100W	120-347V	13,799 lm	138 lm/W	3000K
				14,505 lm	145.1 lm/W	4000K
				13,897 lm	139 lm/W	5000K
		120W	120-347V	16,322 lm	136 lm/W	3000K
				17,390 lm	144.9 lm/W	4000K
				16,419 lm	136.8 lm/W	5000K

DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R51012	RENO-CWP-60W-MW-DV-MCCT-R1	Outdoor Full-Cutoff Wall-Mounted Area Luminaires	–	PF7NU3EQ
R51013	RENO-CWP-120W-MW-DV-MCCT-R2	Outdoor Full-Cutoff Wall-Mounted Area Luminaires	–	P2KVDA84

ACCESSORIES – EMERGENCY LED DRIVERS




R83010
 RENO-EM-EX15
 All Weather Emergency LED
 Driver (100-347V AC, 50-60Hz,
 15W)

Order#	Model	Description
R83010	RENO-EM-EX15	All Weather Emergency LED Driver (100-347V AC, 50-60Hz, 15W)


DIMENSIONS

R1

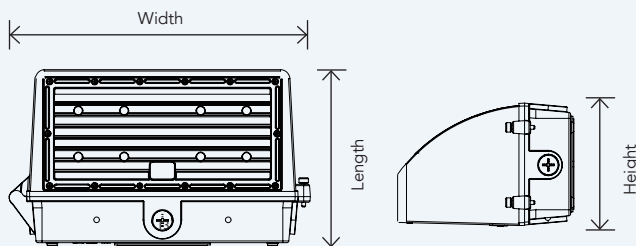

Width: 12.6" (320 mm)
 Height: 5.1" (130 mm)
 Length: 7.4" (187 mm)
 Weight: 6.6 lbs (3 kg)

R2

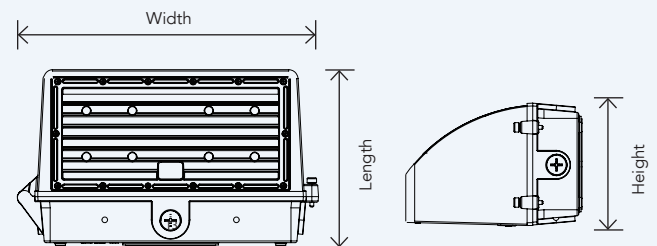

Width: 12.6" (320 mm)
 Height: 5.1" (130 mm)
 Length: 7.4" (187 mm)
 Weight: 6.9 lbs (3.1 kg)