

Date		Project	
Type		Part Number	





ALL-IN-ONE PERFORMANCE LIGHTING

# MAKO Series

## Vapor Tight Highbay

Engineered for tough industrial and commercial spaces, this LED Vapor Tight Highbay combines high performance with exceptional durability. Featuring an IP66 rating for total dust and water protection, it's built to withstand harsh conditions. Certified NSF for food safety and hygiene, it's perfect for environments where cleanliness matters. With NEMA 4X protection, this light is resistant to dust, dirt, and water. The IK10 impact resistance ensures it can endure heavy impacts, making it the ideal solution for warehouses, factories, and other demanding settings.

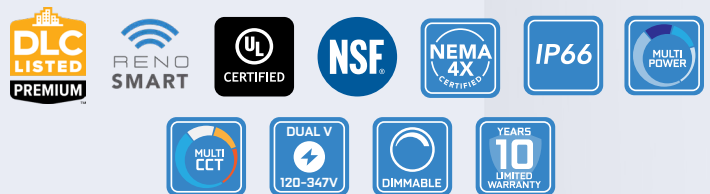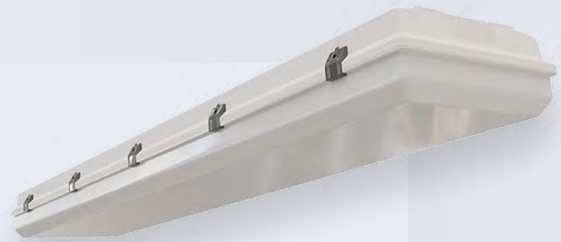

## PRODUCT FEATURES

- IP66, NSF, NEMA 4X rating
- IK10-Rating which ensures protections against 20 joules impact
- Stainless Steel Clips
- V-Hooks and J-Adaptors are included
- Durable PC housing and cover
- Semi frosted PMMA lens
- Rated Lifespan: L70 ~100,000 hrs
- Operating temperature: -40°F to +122°F (-40°C to +50°C)
- 10 year limited warranty

## KEY SPECIFICATIONS

<b>Voltage</b>	120-347V
<b>Wattage</b>	Selectable - 145W / 175W / 220W
<b>Length</b>	4FT.
<b>Power Factor</b>	>0.9
<b>CCT</b>	3500K, 4000K, 5000K
<b>CRI</b>	<80
<b>Lumens</b>	Up to 37,400 lm
<b>Beam Angle</b>	120°
<b>Dimming</b>	0-10V
<b>Mounting</b>	Surface, Suspended
<b>Applications</b>	Commercial, Warehouse, Food Facilities


 EMERGENCY  
BACKUP READY

 RENO SMART  
NLC SYSTEM

 STANDALONE  
SENSOR OPTIONS


## SPECIFICATIONS – MULTI POWER (145/175/220W)

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R33121	RENO-WLVP4-MW-DVMCCT-HL	145/175 220W	120-347V	24,650/29,750/ 37,400lm	170 lm/W	3500/4000/5000K

## DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R33121	RENO-WLVP4-MW-DVMCCT-HL	Direct Linear Ambient Luminaires	S-VXKR2J	–
		High-Bay Luminaires	–	S-2T82PJ
		Stairwell and Passageway	–	S-N413KT

## ACCESSORIES – MOUNTING



R39204  
RENO-RP  
Aircraft Cables for Suspension

Order#	Model	Description
R39204	RENO-RP	Aircraft Cables for Suspension

## ACCESSORIES – EMERGENCY LED DRIVERS



R83002  
 RENO-EM-H25  
 Emergency LED Driver  
 (100-347V AC, 50-60Hz, 25W)

Order#	Model	Description
R83002	RENO-EM-H25	Emergency LED Driver (100-347V AC, 50-60Hz, 25W)


## ACCESSORIES – STANDALONE SENSOR & REMOTES



R71002  
 RENO-SENSOR-MW-H  
 Bi-level dim sensor for linear Highbays




R74004  
 RENO-SENSOR-PIR3.5-PH15M  
 Long Detection Range PIR Sensor



R75103  
 RENO-RS-JK-AD-CORD-L  
 Hardwire " L " Angle Adaptor



R73002  
 RENO-REMOTE-H  
 Controller for bi-level sensor (with screen)



R73005  
 RENO-REMOTE-H-ECO  
 Remote controller for Highbays (without screen)

Order#	Model	Description
R71002	RENO-SENSOR-MW-H	Bi-level dim sensor for linear Highbays
R74004	RENO-SENSOR-PIR3.5-PH15M	Long Detection Range PIR Sensor
R75103	RENO-RS-JK-AD-CORD-L	Hardwire Adjustable "L" Angle Adaptor for 3.5mm Jack Sensors
R73002	RENO-REMOTE-H	Remote Control for Standalone Sensors (With Screen) Note: Only 1 needed per project.
R73005	RENO-REMOTE-H-ECO	Remote Control for Standalone sensors (Without Screen) Note: Only 1 needed per project


## ACCESSORIES – RENO SMART NLC SENSORS




R75001  
RENO-RS-JK-BPDN-12V  
Bluetooth 3.5mm Jack PIR  
Sensor for RENO Smart NLC  
System




R75002  
RENO-RS-JK-BMWM-12V  
Bluetooth 3.5mm Jack  
Microwave Sensor for RENO  
Smart NLC System




R75103  
RENO-RS-JK-AD-CORD-L  
Hardwire " L " Angle Adaptor



R75201  
RENO-RS-GW-BCNW  
Ceiling Mounted Gateway for  
RENO Smart NLC System



R75302  
RENO-RS-RC-BNNG  
7-Key Smart Wall Switch for  
RENO Smart NLC System



R75301  
RENO-RS-RC-BNNN  
5-Key Reset Remote Controller

Order#	Model	Description
R75001	RENO-RS-JK-BPDN-12V	Bluetooth 3.5mm Jack PIR Sensor for RENO Smart NLC System
R75002	RENO-RS-JK-BMWM-12V	Bluetooth 3.5mm Jack Microwave Sensor for RENO Smart NLC System
R75103	RENO-RS-JK-AD-CORD-L	Hardwire Adjustable "L" Angle Adaptor for 3.5mm Jack Sensors
R75201	RENO-RS-GW-BCNW	Ceiling Mounted Gateway for RENO Smart NLC System
R75302	RENO-RS-RC-BNNG	7-Key Smart Wall Switch for RENO Smart NLC System
R75301	RENO-RS-RC-BNNN	5-Key Reset Remote Controller

## DIMENSIONS

