



SYLO Series


Bollard Light



Date		Project	
Type		Part Number	

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

The RENO Lighting's Sylo series Architectural Bollard provides a sleek design and provides a low to the ground illumination to light up walkways and darkened paths. This versatile fixture can be customized by colour temperature and wattage. Great for adding personality to any building's exterior.

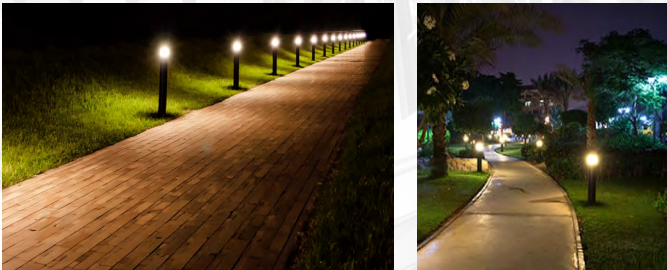

Product Features

- Corrosion resistant aluminum exterior
- Comes integrated with a photocell switch. Optional on/off
- IP65 Rated
- Bronze Housing
- Custom colours available
- Operating Temperature: -40°F to +122°F (-40°C to +50°C)
- Rated Lifetime L70(hrs): >100,000
- 10 year limited warranty

Key Specifications

Size	41" or 42"
Voltage	120-347V
Wattage	Selectable: 14/19/24W
Efficacy	115 lm/W
CCT	Selectable: 30/40/5000K
CRI	76
Lumens	Up to 2,760 lm
Beam Distribution	Type V - 360°
IP Rating	66
Color	Bronze
Applications	Entryway, Pathway, Walkways





SYLO Series | Bollard Light

ARCHITECTURAL LUMINAIRES BY  **RENO**
LIGHTING

Specifications

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R56003	RENO-BL3-MW-DV-MCCT	14/19/24W	120-347V	1,610/2,185/2,760 lm	115 lm/W	30/40/5000K
R56004	RENO-BL4-MW-DV-MCCT	14/19/24W	120-347V	1,610/2,185/2,760 lm	115 lm/W	30/40/5000K

Dimensions

RENO-BL3-MW-DV-MCCT

Full Height: 42.2" (1073 mm)
Body Height: 34.1" (865 mm)
Width: 6.3" (160 mm)



RENO-BL4-MW-DV-MCCT

Full Height: 41.3" (1048 mm)
Body Height: 34.1" (865 mm)
Width: 6.3" (160 mm)

