




## RECESSED DOWNLIGHTS

When it comes to highlighting key focal points, illuminating critical task surfaces, and creating visual interest in a space, our full line of recessed downlights is the popular choice for specifiers, installers, and lighting designers.

Whether you require a low-profile form factor, the ability to adjust the light beam to provide special lighting accents or efficient downlighting with controlled glare, we have the solution your customer needs.



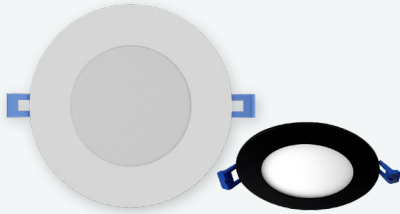

Available in black.



### R36013 RENO-4-S12W-MCCT-WH

#### 4" Slim Downlight

- 12W / 800 lm
- Multi CCT (27/30/35/40/5000K)
- >80 CRI
- 120V TRIAC dimming
- IC rated and Damp location rated
- Compatible with soffit installations
- 3", 6" & 8" models also available
- Popular 4" size also available in Matte Black



Available in black.



### R36123 RENO-LED-AURA-4-S12W-FG-5CCT-WH

#### 4" Round Regress Gimbal

- Multi CCT (27/30/35/40/5000K)
- 12W / 900 lm
- 90 CRI
- 120V TRIAC dimming
- IC rated and Wet location rated
- 3.5" round, square, and 2-head square models available
- Available in Smooth White or Matte Black
- Universal Pre-Mounting plate available



Available in black.



### R36106 RENO-LED-4-S9W-FG-5CCT-WH

#### 4" Round Floating Gimbal

- Multi CCT (27/30/35/40/5000K)
- 9W / 700 lm
- 90 CRI
- 120V TRIAC dimming
- IC rated and Wet location rated
- Available in Smooth White or Matte Black
- Universal Pre-Mounting plate available



### R36222 RENO-DL6-MW-DV-MCCT-AL

#### 6" Aluminum Reflector Commercial Downlight

- Dual Voltage (120-347V)
- Multi Power (13/19/27W) up to 2,511 lm
- Multi CCT (27/30/35/40/5000K)
- >93 CRI
- 0-10V dimming
- IC rated and Damp location rated
- 4", 8" & 10" models also available



### R39206 RENO-DL6-MW-DV-MCCT-G2

#### 6" Commercial Downlight

- Dual Voltage (120-347V)
- Multi Power (13/19/27W) up to 3,000 lm
- Multi CCT (27/30/35/40/5000K)
- 93 CRI
- 0-10V dimming
- IC rated
- 4", 8" & 10" models also available



### R36033 RENO-LED-4-S12W-5CCT-WH-FR

#### 4" Fire Rated Slim Downlight

- 2-Hour Fire Rated
- 12W / 800 lm
- Multi CCT (27/30/35/40/5000K)
- >80 CRI
- 120V TRIAC dimming
- IC rated and Wet location rated
- 6" Slim and 4" Floating Gimbal models also available



2 HOUR FIRE RATING  
Tested to comply with I.E. 263,  
ASTM E119 & CAN ULC 5101

More info?  
[renolighting.com](http://renolighting.com)

Questions?  
905-604-4666



CONTACT YOUR REP FOR PRICING!