

INSTRUCTIONS FOR THE FOLLOWING FIXTURES

ORDER#	MODEL#
R31137	RENO-TH20W-5CCT-ADJ-HALO-WH
R31138	RENO-TH20W-5CCT-ADJ-HALO-BK
R31139	RENO-TH30W-5CCT-ADJ-HALO-WH
R31140	RENO-TH30W-5CCT-ADJ-HALO-BK

SAFETY INSTRUCTIONS

- Read all of these instructions before installing the track light.
- Turn off the power at the main switch before installing or modifying the system.
- Do not install in wet locations.
- Do not attempt to energize any device other than a track light fixture.
- Consult a qualified electrician prior to wiring.

INSTALLATION STEPS:

Step 1: The adapter polarity must match the tracks polarity: L-L, N-N, E-E (see **Figure 1**).

Step 2: Push the adapter upwards ① and rotate it to the right ②, install the adapter correctly into the tracks (see **Fig**

Step 3: To remove the fixture, pull the locking clip downwards (away from the track) and turn counter clockwise 90°.

Step 4: Once assembly is complete, turn on power to confirm fixture is working properly.

CCT SELECTION:

1. The lighting fixture has a color temperature selection DIP switch (see **Figure 2**).
2. Prior to powering the fixture, use the DIP switch to select the desired fixture CCT (see **Figure 2**).

FIXTURE POSITIONING:

1. Turn on the fixture, then swivel the luminaire housing horizontally or vertically to adjust aiming position as needed.
2. Tilt: 90° vertical Rotation: 350° (see **Figure 3**)

Figure 1.

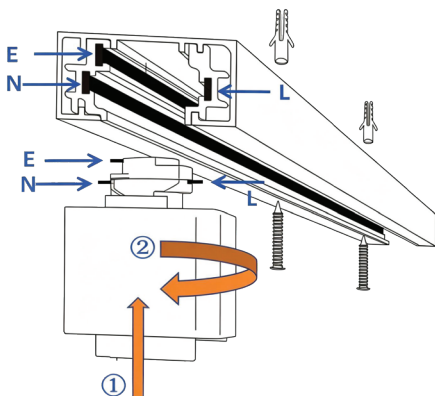


Figure 2.

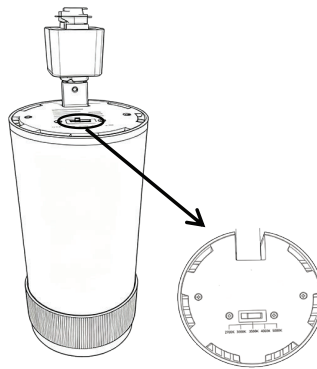


Figure 3.

