

Date: _____ Project: _____

Type: _____ Part #: _____



Story Series

Zoomable Track Head

The STORY Series Track Light luminaire offers superior light output in a small, unobtrusive design. With customizable beam angles and adjustable heads, this light offers flexibility to highlight specific areas in any application. Ideal for accent and display lighting.



Product Features

- 120V TRIAC Dimming
- High quality cold-forged aluminum housing for better heat dissipation
- Compatible with J-Type track
- Luminaire arm is 180° tilt-able and 350° rotation adjustable
- Zoomable degree adjustable from 10°-60° to meet different application needs
- Colours Available: Black & White
- Glass Lens
- Rated Lifespan: L70 ~ 100,000 Hrs
- Operating Temperature: -20°C ~ +40°C (-4°F ~ +104°F)
- 5 Year warranty.

Specifications

Voltage	120V AC
Wattage	6.2" 20W 7.5" 30W
CCT	27/30/35/40/50K
THD	≤20%
CRI	93
Lumens	6.2" Up to 2,112 lm 7.5" Up to 3,216 lm
Efficacy	6.2" Up to 105 lm/W 7.5" Up to 107 lm/W
Dimming	Triac Dimming
Beam Angle	10-60° Zoomable
Mounting	Track mount

Specifications – 6.2" Zoomable Track Head

at 10° Beam Angle

Order #	Model	Finish	Voltage	Wattage	Lumens	Efficacy	CCT
R31137	RENO-TH20W-5CCT-ADJ-HALO-WH	White	120-347V	20W	1,744.2 lm	87.2 lm/W	2,700K
R31138	RENO-TH20W-5CCT-ADJ-HALO-BK	Black			1,773.4 lm	88.6 lm/W	3,000K
					1,886.5 lm	94.3 lm/W	3,500K
					2,000.1 lm	100.0 lm/W	4,000K
					2,099.5 lm	104.9 lm/W	5,000K

at 60° Beam Angle

Order #	Model	Finish	Voltage	Wattage	Lumens	Efficacy	CCT
R31137	RENO-TH20W-5CCT-ADJ-HALO-WH	White	120-347V	20W	1,760.7 lm	88.0 lm/W	2,700K
R31138	RENO-TH20W-5CCT-ADJ-HALO-BK	Black			1,793.9 lm	89.6 lm/W	3,000K
					1,883.9 lm	94.1 lm/W	3,500K
					2,004.9 lm	100.2 lm/W	4,000K
					2,112.5 lm	105.6 lm/W	5,000K

Specifications – 7.5" Zoomable Track Head

at 10° Beam Angle


Order #	Model	Finish	Voltage	Wattage	Lumens	Efficacy	CCT
R31139	RENO-TH20W-5CCT-ADJ-HALO-WH	White	120-347V	30W	2,682.4 lm	89.4 lm/W	2,700K
R31140	RENO-TH20W-5CCT-ADJ-HALO-BK	Black			2,754.6 lm	91.8 lm/W	3,000K
					2,783.1 lm	92.7 lm/W	3,500K
					2,990.2 lm	99.6 lm/W	4,000K
					3,160.5 lm	105.3 lm/W	5,000K

at 60° Beam Angle

Order #	Model	Finish	Voltage	Wattage	Lumens	Efficacy	CCT
R31139	RENO-TH20W-5CCT-ADJ-HALO-WH	White	120-347V	30W	2,716.1 lm	90.5 lm/W	2,700K
R31140	RENO-TH20W-5CCT-ADJ-HALO-BK	Black			2,812.8 lm	93.7 lm/W	3,000K
					2,812.8 lm	93.7 lm/W	3,500K
					3,031.5 lm	101.0 lm/W	4,000K
					3,216.5 lm	107.2 lm/W	5,000K


Features & Functions

Overview

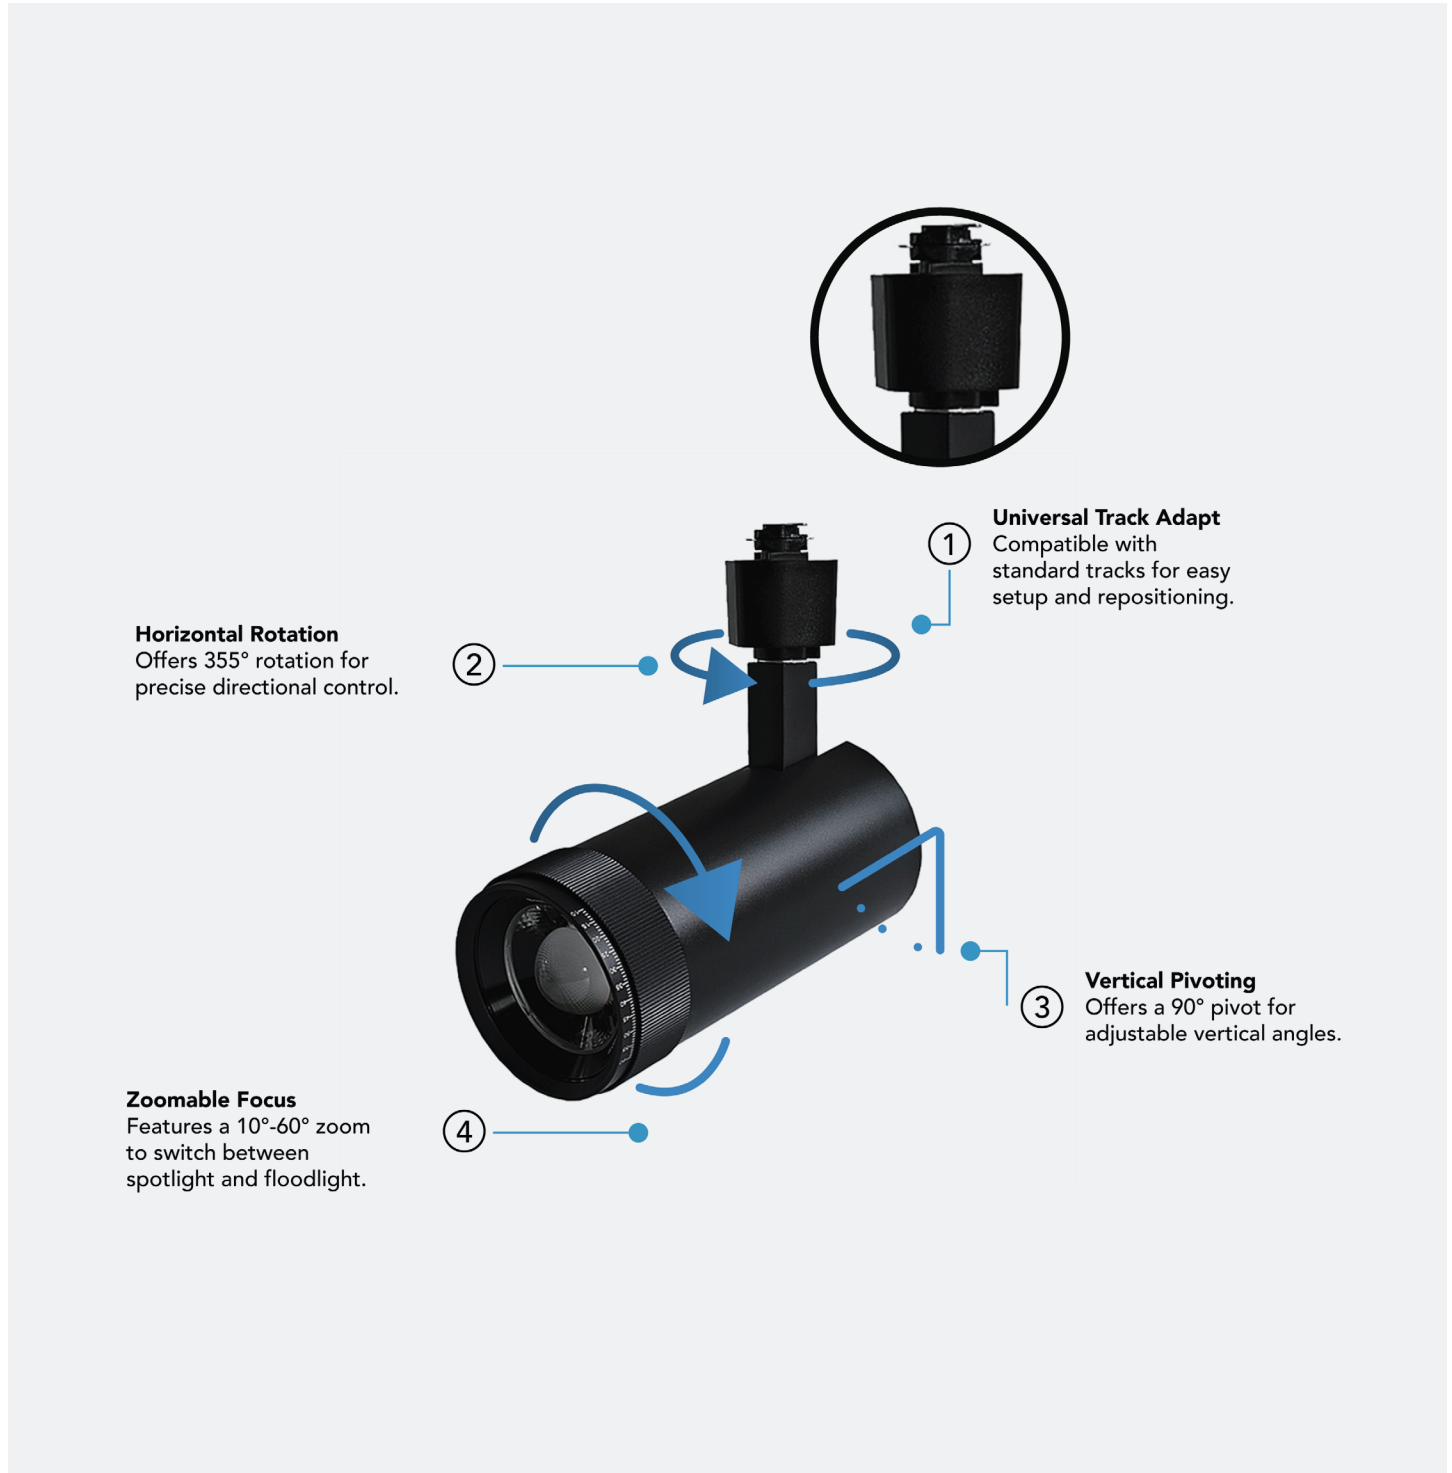

Dimensions

Zoomable Track Head

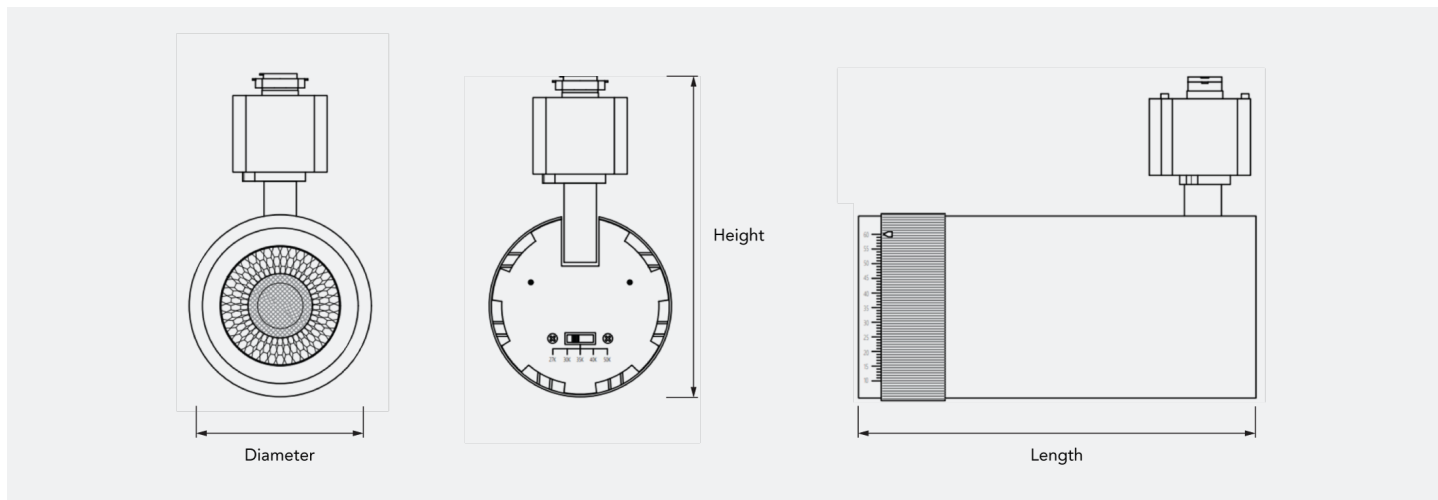

Order #	Model	Finish	Diameter	Height	Length	Weight
R31137	RENO-TH20W-5CCT-ADJ-HALO-WH	White	3" (75 mm)	8.5" (215.3 mm)	6.2" (158 mm)	0.8kg (1.76lbs)
R31138	RENO-TH20W-5CCT-ADJ-HALO-BK	Black	3" (75 mm)	8.5" (215.3 mm)	6.2" (158 mm)	0.8kg (1.76lbs)
R31139	RENO-TH20W-5CCT-ADJ-HALO-WH	White	3.5" (90 mm)	9.6" (244 mm)	7.5" (190 mm)	1.11kg (2.44lbs)
R31140	RENO-TH20W-5CCT-ADJ-HALO-BK	Black	3.5" (90 mm)	9.6" (244 mm)	7.5" (190 mm)	1.11kg (2.44lbs)