RENO LIGHTING

Date		Project	
Type		Part Number	

PRIME ALL-IN-ONE PERFORMANCE LIGHTING

EMERGENCY Series

Steel Body Running Man Combo Sign



The Emergency Series Steel Body Running Man Combo Sign is encased in a sturdy, all steel housing. It comes standard with a mounting canopy, three pictograms, one backplate and all mounting hardware. An external LED status indicator and test switch is standard. Powered with long life LED chips, they are the perfect choice for both new and retrofit projects.

PRODUCT FEATURES

- Steel housing and PC pictogram sign
- Thermoplastic ABS heads
- Universal (wall, ceiling, side) mounting
- Universal field-selectable single/double-face
- Test switch and charge Indicator light
- Damp location rated
- Sealed Nickel Cadmium Battery
- 120 minutes discharge after battery charge 24 hours
- 30W Battery Power, 6V Battery, Supports 6W Remote LED Heads for 120+ min
- Operating temperature: 14°F to +104°F (-10°C to +40°C)
- Fully-illuminated 6" characters
- High illuminance LED display
- 5 year warranty

KEY SPECIFICATIONS

Input Voltage	120-347V
Power	2W
Lamp Power	2 x 5W
Lamp Lumens	940 lm
Power Factor	>0.9
Discharge Time	>120 Minutes
Recharge Time	24 Hours
Finish	White
Applications	Commercial, Warehouses, Retail, Education Facilities
Mounting	Wall, End, and Ceiling


905-604-4666 | info@renolighting.com | www.renolighting.com

SPECIFICATIONS


Order#	Model	Input Voltage	Power	Discharge Time	Charging Time	Battery Type
R61005	RENO-SRMC-U	120-347VAC	2W Heads: 2 x 5W	>120 Minutes	24 Hours	Sealed Nickel Cadmium

MOUNTING


WALL MOUNT

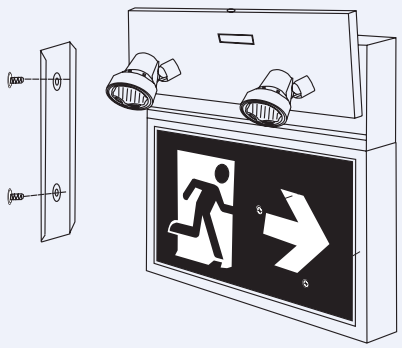

END MOUNT

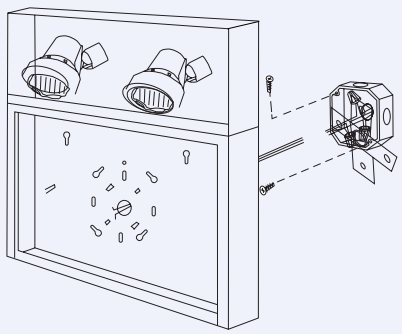

CEILING MOUNT

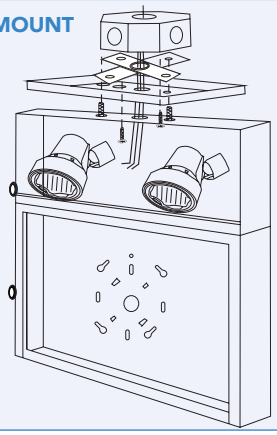


PICTOGRAMS



LEFT



STRAIGHT (REVERSIBLE)

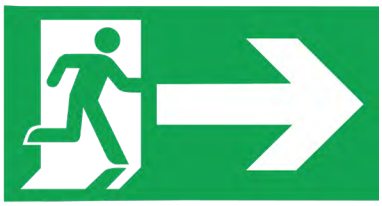


RIGHT

SPECIFICATIONS


Order#	Model	Input Voltage	Power	Discharge Time	Charging Time	Battery Type
R61005	RENO-SRMC-U	120-347VAC	2W Heads: 2 x 5W	>120 Minutes	24 Hours	Sealed Nickel Cadmium

MOUNTING


WALL MOUNT

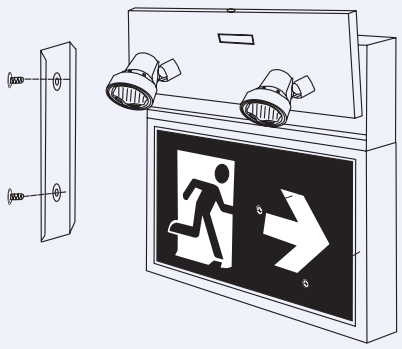


END MOUNT

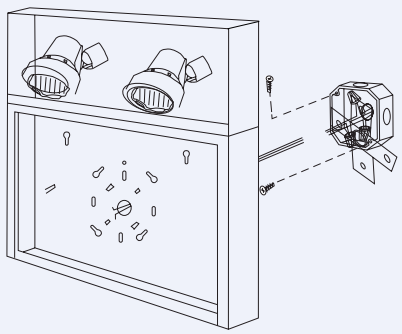

CEILING MOUNT

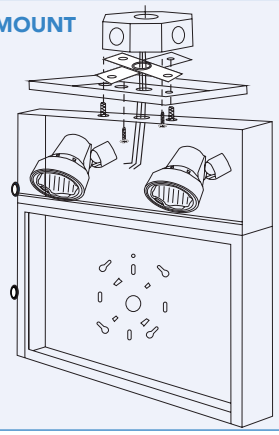

DIMENSIONS

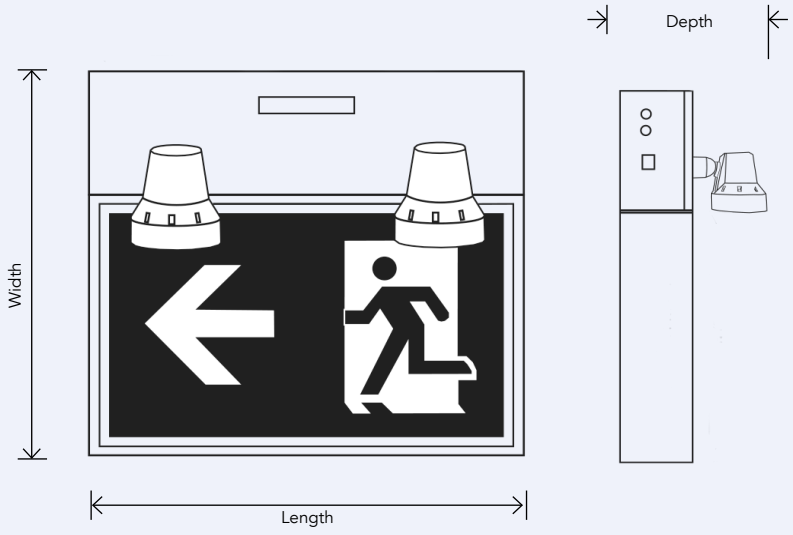

Width:	12” (305 mm)
Depth:	3.15” (80 mm)
Length	13.2” (335 mm)
Weight:	3 lbs (1.36 kg)